
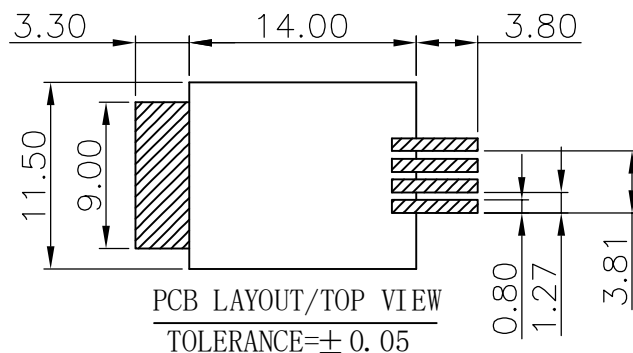

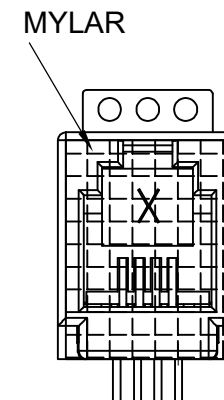
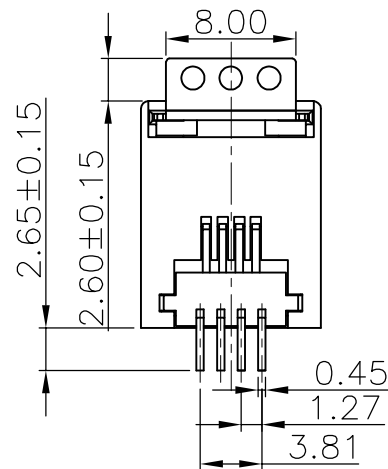


REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

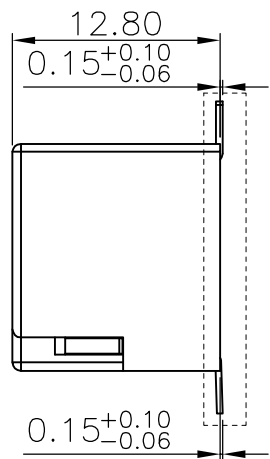

MATING FORCE:2.2 Kgf MAX
DURABILITY:750 MATING CYCLES

MATERIAL:
HOUSING:LCP BLACK UL94V-0
TERMINAL : C5191 T=0.35±0.01 AU/TIN,3u"/6u" PLATING
HOOK:C2680 T=0.40 NI/SN PLATING.
RoHS APPROVED.

PART NO. INFORMATION

RJ01- X 5 0 X - 068

CONTACT PLATED —
1: G/F 2: AU 3U"
3: AU 5U" 4: AU 10U"
5: AU 15U" 6: AU 30U"

PACKAGE
R: TAPE REEL
T: TRAY

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:					
.X	±	0.30	X.*	±	3°
.XX	±	0.20	.X.*	±	2°
.XXX	±	0.10	.XX.*	±	1°

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:	DATE:
I. L	2017. 3. 1
CHECKED:	DATE:
C. W	2017. 3. 1
APPROVED:	DATE:
C. W	2017. 3. 1

TITLE:		
VERTICAL SMT RJ11 4P JACK W=11.1		
MATERILA:	PART NO: RJ01-X50X-068	SIZE: A4
FINSH:	DWG NO: RJ01-X50X-068	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS	
-----------	------------	--------------	--------------------	---