
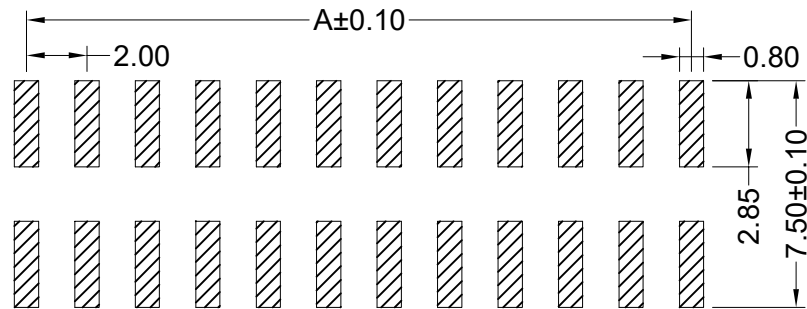
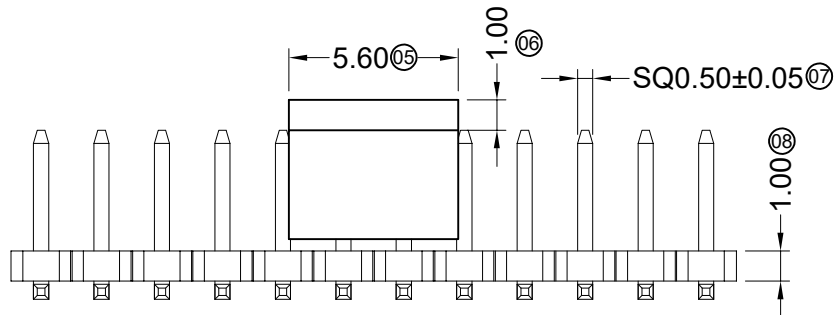



RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

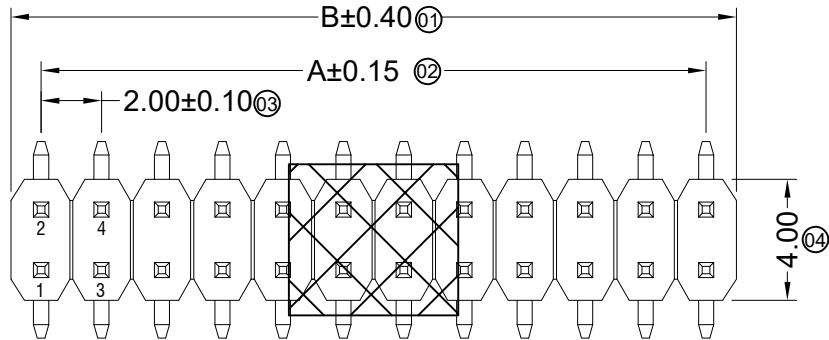

Recommended P.C.B Layout
General Tolerance ± 0.05

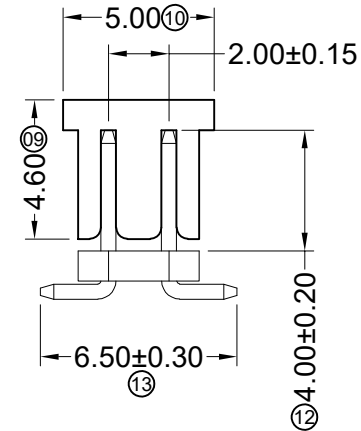

■ Specifications :

- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 20\text{m}\Omega$
- After environmental testing: $\leq 30\text{m}\Omega$

Poles	Dimensions (mm)		Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B		A	B
2*02	2.00	4.00	2*15	28.00	30.00	2*28	54.00	56.00
2*03	4.00	6.00	2*16	30.00	32.00	2*29	56.00	58.00
2*04	6.00	8.00	2*17	32.00	34.00	2*30	58.00	60.00
2*05	8.00	10.00	2*18	34.00	36.00	2*31	60.00	62.00
2*06	10.00	12.00	2*19	36.00	38.00	2*32	62.00	64.00
2*07	12.00	14.00	2*20	38.00	40.00	2*33	64.00	66.00
2*08	14.00	16.00	2*21	40.00	42.00	2*34	66.00	68.00
2*09	16.00	18.00	2*22	42.00	44.00	2*35	68.00	70.00
2*10	18.00	20.00	2*23	44.00	46.00	2*36	70.00	72.00
2*11	20.00	22.00	2*24	46.00	48.00	2*37	72.00	74.00
2*12	22.00	24.00	2*25	48.00	50.00	2*38	74.00	76.00
2*13	24.00	26.00	2*26	50.00	52.00	2*39	76.00	78.00
2*14	26.00	28.00	2*27	52.00	54.00	2*40	78.00	80.00

2011WVS-2*XX-6TV1	PA6T UL 94V-0	Brass	Gold-Flash	1,000Pcs
Part No.	Material	Material(Pin)	Finish(Pin)	Q' ty/Bag

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.30	.X'	$\pm 3'$
.XX	± 0.20	.X''	$\pm 2'$
.XXX	± 0.10	.XX'	$\pm 1'$

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: DATE:

I. L. 2017. 3. 1

CHECKED: DATE:

C. W. 2017. 3. 1

APPROVED: DATE:

C. W. 2017. 3. 1

TITLE:

2.00 mm Pin Header Connector

MATERIAL:

PART NO:

2011WVS-2*XX-6TV1

SIZE:

A4

FINISH:

DWG NO:


2011WVS-2*XX-6TV1

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS



1

2

3

4

5

6

7

8