

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

Specifications

Current Rating: 7.0Amp

Insulation Resistance: 100MΩ Min.

Dielectric Withstanding: 500V AC

Contact Resistance: 30MΩ Max.

Operating Temperature: -40°C to +105°C




Materials

Contact Material: Phosphor Bronze


Insulation Material: Polyester, UL 94V-0

Nylon 9T

All materials must be ROHS materials

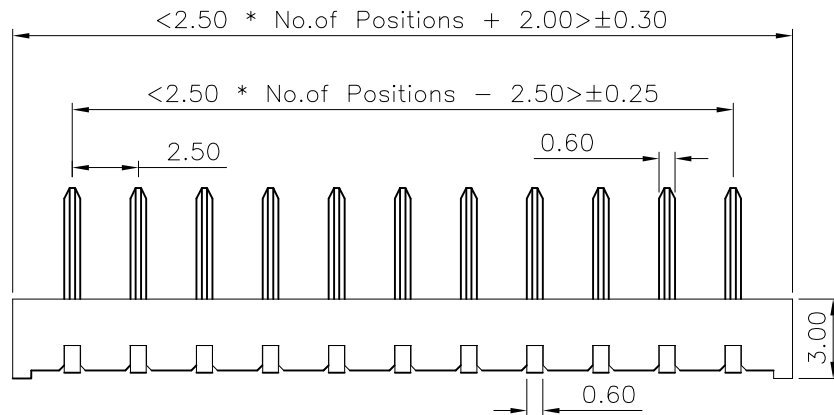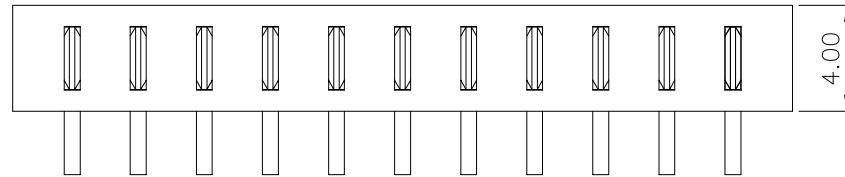

Recommended P.C.Board
Hole Layout
(Tolerance: ± 0.05)



PART NO. INFORMATION

BH250R-XX M X C 5 T - 001

NO.OF PINS PER ROW
03-11

GENDER
F: FEMALE
M: MALE

CONTACT PLATED
1: TIN
2: GOLD FLASH

PACKAGE
T: TUBE

HOUSING COLOR
5: BLACK
HOUSING MATERIAL
C: PA9T

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.30	X.*	±	5'
.X	±	0.25	.X.*	±	3'
.XX	±	0.15	.XX.*	±	2'

Website: www.bsc-elec.com

Email: bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L.

2017. 3. 1

CHECKED:

DATE:

C. W.

2017. 3. 1

APPROVED:

DATE:

C. W.

2017. 3. 1

TITLE:

2.5MM BATTERY HOLDER MALE RIGHT ANGLE

MATERILA:

PART NO:

BH250R-XXMXC5T-001

SIZE:

A4

FINSH:

DWG NO:

BH250R-XXMXC5T-001

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS

