




RoHS Compliant

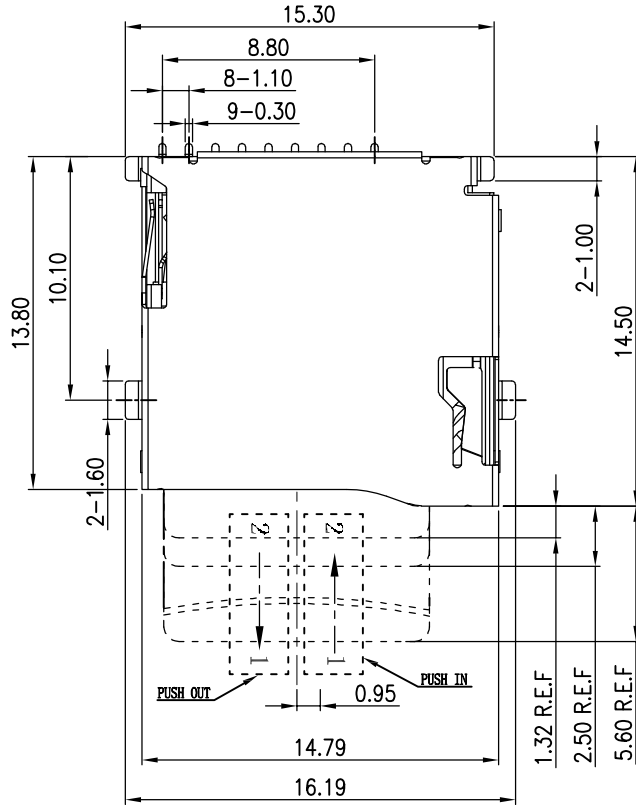

| NO. | ASSIGNMENT           |
|-----|----------------------|
| 1#  | DAT2                 |
| 2#  | CD/DAT3 <sup>2</sup> |
| 3#  | CMD                  |
| 4#  | VDD                  |
| 9#  | CD                   |
| 5#  | CLK                  |
| 6#  | VSS                  |
| 7#  | DAT0                 |
| 8#  | DAT1                 |

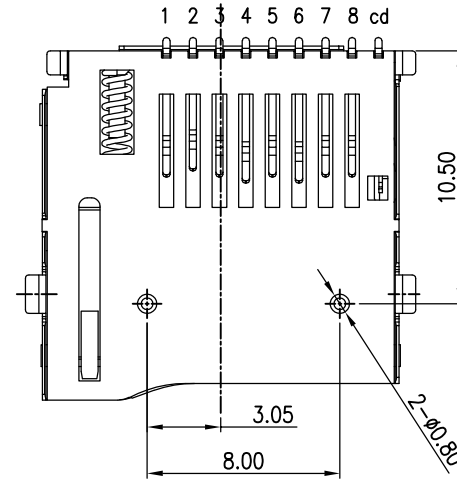

## PART NO. INFORMATION

TFWF - 09 X X 5 R - 012


09:9P

CONTACT PLATED  
1: GOLD FLASH  
2: GOLD 3U"  
3: GOLD 5U"  
4: GOLD 10U"  
5: GOLD 15U"  
6: GOLD 30U"

PACKAGE  
R: TAPE REEL  
HOUSING COLOR  
2: WHITE  
5: BLACK  
9: NATURE

HOUSING MATERIAL  
A: LCP B: PBT  
C: PA9T D: PA6T  
E: PA46 F: PA66

| REVISIONS |             |      |        |
|-----------|-------------|------|--------|
| REV.      | DESCRIPTION | DATE | DESIGN |
|           |             |      |        |

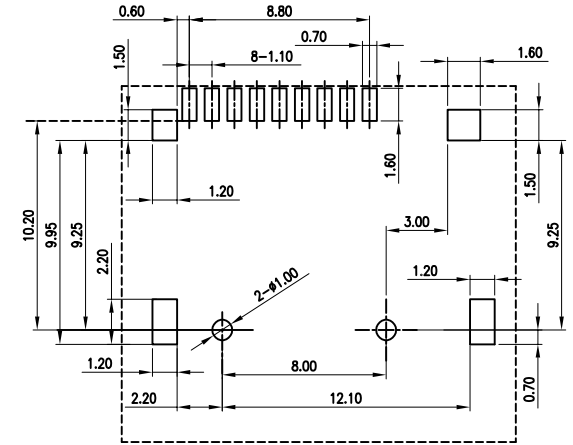

(RECOMMENDED/P.C.B)HOLE LAYOUT  
COMPONENT SIDE VIEW TOLERANCE:±0.05

### 规格说明:

1.尺寸测量:

1-1: "▲"为重点检验尺寸;

2.电气特性:

2-1: 额定接触电流: 0.5A Max;

2-2: 接触电阻: 100 mΩ Max;

2-3: 绝缘电阻: 1000MΩ MIN. 500V DC 测试时长1分钟。

3.机械特性:

3-1: 锁退卡耐久:5000 cycles;

3-2: 插卡力: 40N MAX;

3-3: 退卡力: 1.0N Min.

4.环境特性:

4-1: 测试温度范围: -25 ℃ to +85 ℃;

4-2: 盐雾测试: 5% 浓度盐水 端子镀锡区域喷雾8H、刷金区域喷雾24H、外壳盐雾24H。

|     |    |                                             |      |
|-----|----|---------------------------------------------|------|
| 6   | 外壳 | SUS304 镀镍底30u"侧脚镀金0.5u"~平脚                  | 1Pcs |
| 5   | 拉杆 | SUS304~去磁                                   | 1Pcs |
| 4   | 滑块 | LCP~黑色                                      | 1Pcs |
| 3   | 弹簧 | SWP-B                                       | 1Pcs |
| 2   | 端子 | C5191 T=0.15mm~电镀镍底30u" 镀雾锡80u" 接触区域镀金0.5u" | 1Pcs |
| 1   | 主体 | 黑色LCP                                       | 1Pcs |
| No. | 品名 | 规格                                          | 数量   |

Bestcreate Technology Limited

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

|      |   |      |       |   |    |
|------|---|------|-------|---|----|
| .X   | ± | 0.35 | X.*   | ± | 5" |
| .XX  | ± | 0.25 | .X.*  | ± | 2" |
| .XXX | ± | 0.15 | .XX.* | ± | 1" |

Website:www.bsc-elec.com  
Email:bestcreate@bsc-elec.com

DESIGN: I.L DATE: 2017.3.1

CHECKED: C.W DATE: 2017.3.1

APPROVED: C.W DATE: 2017.3.1

TITLE: TF 卡座 外焊 9Pin 贴片式  
平脚镀镍 透明 载带自粘


|           |                          |               |
|-----------|--------------------------|---------------|
| MATERIAL: | PART NO: TFWF-09XX5R-012 | SIZE: A4      |
| FINISH:   | DWG NO: TFWF-09XX5R-012  | SHEET: 1 OF 2 |

RoHS Compliant

REVISIONS

| REV. | DESCRIPTION | DATE | DESIGN |
|------|-------------|------|--------|
|      |             |      |        |


包装方向 ← 客户使用方向 →

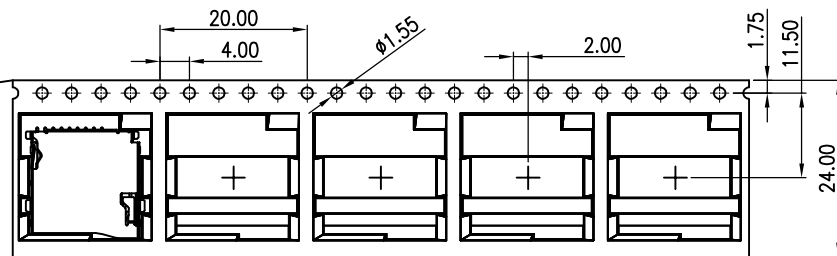

NOTES

1. 每卷包装数量:1000PCS/每卷

2. 卷带包装方式:

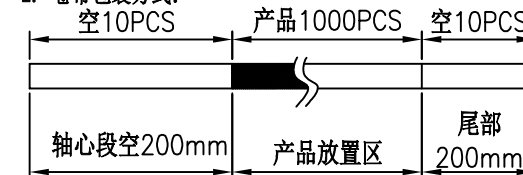

3. 每箱包装数量:10000PCS/箱

4. 重量:





4.1 净重: Kg

4.2 毛重: Kg

盖带剥离角度:165°~180°

剥离力:20~130g

载带

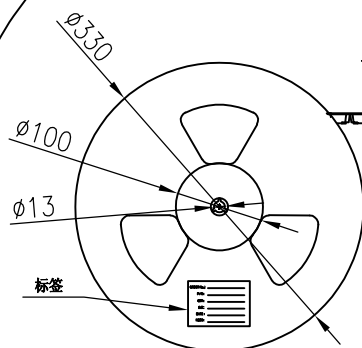

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

|      |   |      |      |   |    |
|------|---|------|------|---|----|
| .X   | ± | 0.35 | X.*  | ± | 5" |
| .XX  | ± | 0.25 | .X*  | ± | 2" |
| .XXX | ± | 0.15 | .XX* | ± | 1" |

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L

2017. 3. 1

CHECKED:

DATE:

C. W

2017. 3. 1

APPROVED:

DATE:

C. W

2017. 3. 1

TITLE:

TF 卡座 外焊 9Pin 贴片式  
平脚镀镍 透明 载带自粘

MATERILA:

PART NO:

TFWF-09XX5R-012

SIZE:

A4

FINSH:

DWG NO:

TFWF-09XX5R-012

SHEET:

2 OF 2

REV:

A

UNIT

mm

SCALE

1=1

QUALITY  
SYMBOLS

