







RoHS Compliant

REVISIONS


REV.	DESCRIPTION	DATE	DESIGN

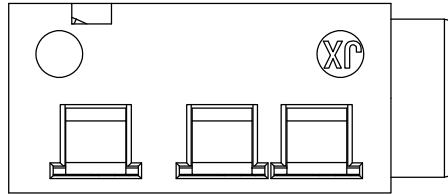

- 一、Materials and electroplating specifications:
1.terminal: Brass; After nickel plating 30u",
tin plating 80u";
2. Insulator: Polyamide; Color:Black.
- 二、SPECIALITY:
1. RATED:30V Max/0.5A Max
2. CONTACT RESISTANCE: 100mΩ Max;
3. DIELECTRIC STRENGTH: 500V/AC 1min No Breakdown
4. INSULATION RESISTANCE:100MΩ Min. 500V DC
5. INSERTION FORCE:3.0Kgf Max
WITHDRAWAL FORCE:0.3Kgf Min
6. temperature:-20℃ to +70℃
7. Parts must comply with RoHS standards

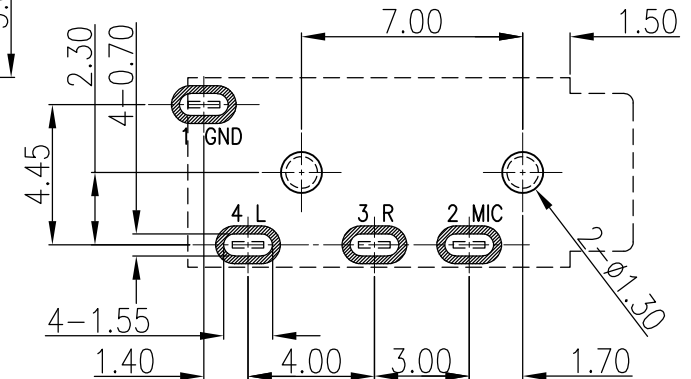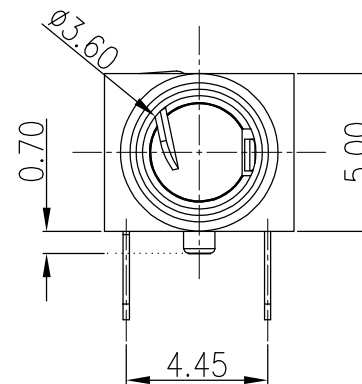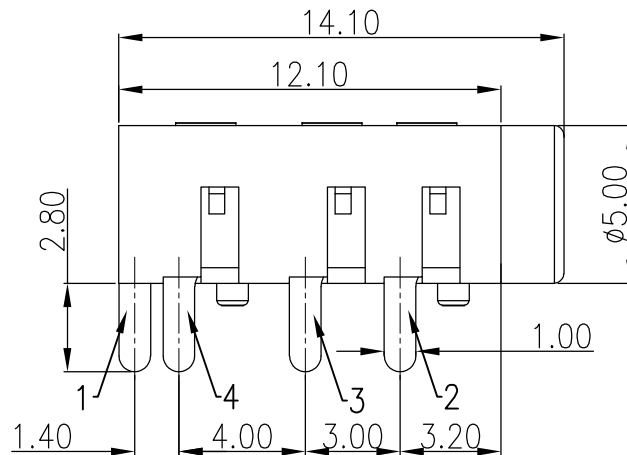

P.C.B LAYOUT BOTTOM VIEW
(for reference only)

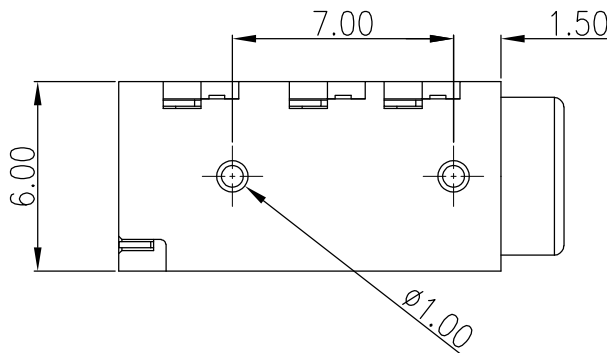

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30	X.*	±	5"
.XX	±	0.20	.X*	±	3"
.XXX	±	0.10	.XX*	±	1"

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L
DATE: 2017. 3. 1

CHECKED: C. W
DATE: 2017. 3. 1

APPROVED: C. W
DATE: 2017. 3. 1

TITLE: PJ 插件式 4PIN 黑色主体带"JX"
Φ 1.00mm 定位柱 插口Φ 5.00mm 通孔


MATERIAL: FINISH:	PART NO: PJ350-04-A0012 DWG NO: PJ350-04-A0012	SIZE: A4 SHEET 1 OF 2
-------------------	---	--------------------------

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------


RoHS Compliant

REVISIONS


REV.	DESCRIPTION	DATE	DESIGN




PJ产品图示

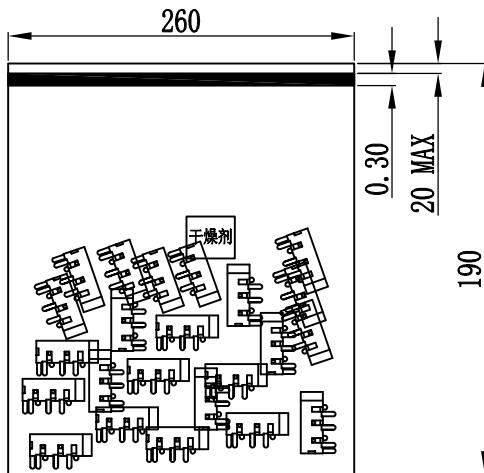


热封袋260*190*0.18
每袋装1000PCS产品及+1包干燥
剂+流水标签,后热封袋口

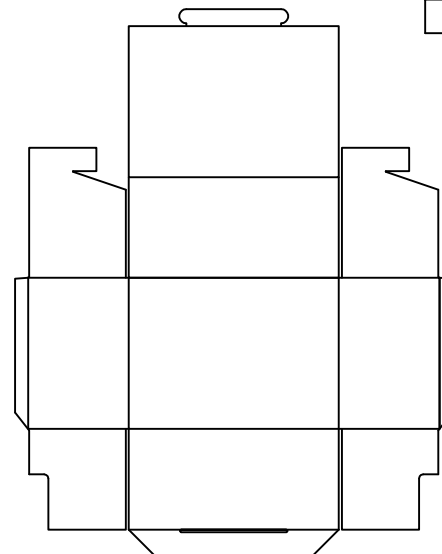

内箱原材料图示

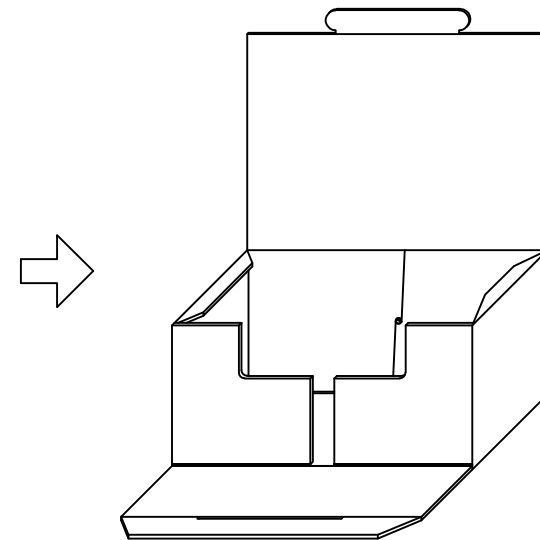


内箱折叠后图示(250*180*120)
热封袋热封后,装入内箱
每内箱装5袋,既装5000PCS产品

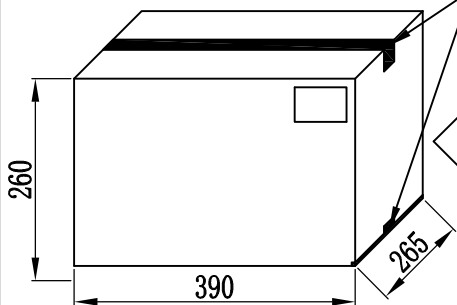


外箱封箱图示
390*265*260
虚线框位置为粘贴外箱标签位置

使用透明胶纸封口

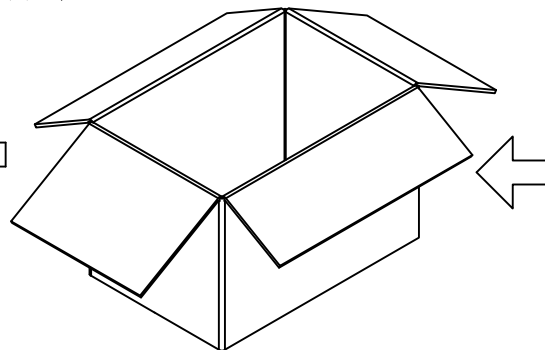

外箱图示

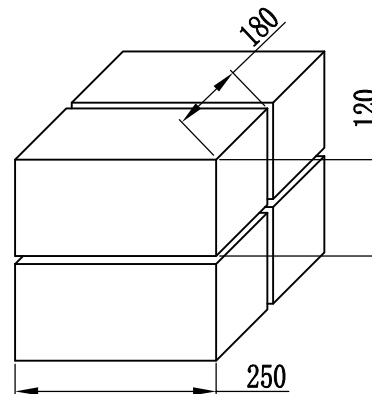

内箱装外箱图示

注意事项:

1. 每热封袋装1000PCS产品,装完后需对袋口进行热封;
2. 内箱需沿折线对叠,每箱装5袋(既每箱装5000PCS);
3. 内箱装入外箱如右图所示以2*2的方式装入外箱;
4. 外箱封口方式:上封“一”字,下封“工”字口。

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30	X.*	±	5"
.XX	±	0.20	.X.*	±	3"
.XXX	±	0.10	.XX.*	±	1"

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L
DATE: 2017. 3. 1

CHECKED: C. W
DATE: 2017. 3. 1

APPROVED: C. W
DATE: 2017. 3. 1

TITLE: PJ 插件式 4PIN 黑色主体带“JX”
Φ1.00mm 定位柱 插口Φ5.00mm 通孔

MATERILA:	PART NO: PJ350-04-A0012	SIZE: A4
FINSH:	DWG NO: PJ350-04-A0012	SHEET 2 OF 2

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------