

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

规格说明:

1:电气特性:

- 1-1: 额定接触电流: 5V 0.5A;
1-2: 接触电阻: 100 mΩ Max;
1-3: 绝缘电阻: 1000MΩ MIN.500V DC 测试时长1分钟;

2:机械特性:

- 2-1: 插拔耐久:1500 cacles;
2-2: 插入力: 35N Max;
2-3: 拔出力: 10N Max.

3:环境特性:

- 3-1: 储存温度: -20 ℃ to +60 ℃;
3-2: 盐雾测试: 5% 浓度盐水 耐盐雾端子镀锡区域8H、
刷金区域24H、外壳24H。

4:产品环保符合RoHS2.0要求。

PART NO. INFORMATION

U04-A F X X X R - 031

PORT TYPE A: TYPE A	PACKAGE R:TAPE&REEL
GENDER F: FEMALE M: MALE	HOUSING COLOR 1: RED 5: BLACK 2: WHITE 3: GREEN 9: NATURE
CONTACT PLATED 1: GOLD FLASH 2: GOLD 3U" 3: GOLD 5U" 4: GOLD 10U" 5: GOLD 15U" 6: GOLD 30U"	HOUSING MATERIAL A: LCP B: PBT C: PA9T D: PA6T E: PA46 F: PA66

3	外壳	SPCC 电镀镍50u" Min~	1Pcs
2	端子	C2680 电镀镍30U" 上锡区镀锡80U"以上 接触区刷金0.5U"	1Pcs
1	主体	PBT~白色	1Pcs
NO.	品名	规格	数量

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.*	± 3"
.X	± 0.20	.X*	± 2"
.XX	± 0.10	.XX*	± 1"

Website: www.bsc-elec.com
E-mail: bestcreate@bsc-elec.com

DESIGN: I.L
DATE: 2025.02.25

CHECKED: C.W
DATE: 2025.02.25


APPROVED: C.W
DATE: 2025.02.25

TITLE: USB 2.0A/F 90° 插件式弯脚 (15.2)
插板有卷DIP


MATERILA:	PART NO: U04-AFXXXXR-031	SIZE: A4
FINSH:	DWG NO: U04-AFXXXXR-031	SHEET: 1 OF 2

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS


RoHS Compliant




产品示意图

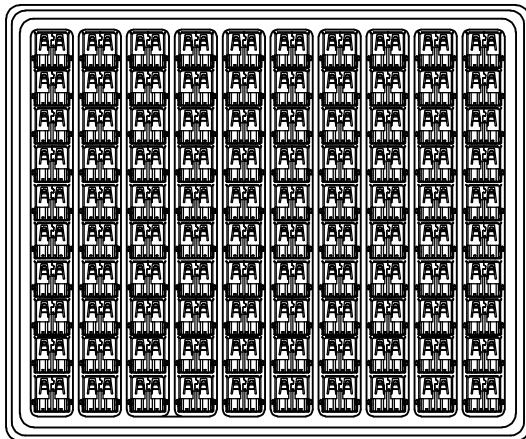


产品装吸塑盘示意图
每吸塑盘装100PCS产品

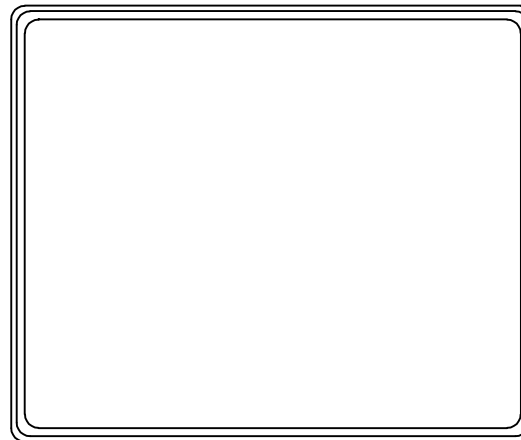

吸塑盒上盖示意图
吸塑盘装完产品后盖上上盖

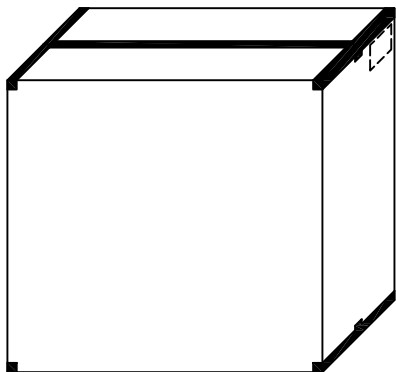


纸箱尺寸: 34*22*31.5 CM
右上角虚线框位置为粘贴外箱标签位置(无铆钉口面)

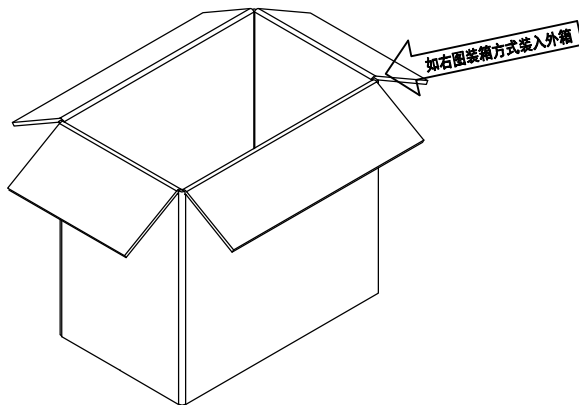

如右图装箱方式装入外箱

- 包装方式:
1. 每吸塑盒装100PCS产品, 装完后盖上吸塑上盖;
 2. 每箱装5000PCS, 装二栋, 每栋25层, 前二十层每十层用PE膜缠绕固定, 后5层用PE膜缠绕固定, 如右图所示。
 3. 外箱封口方式: 封“工”字口。

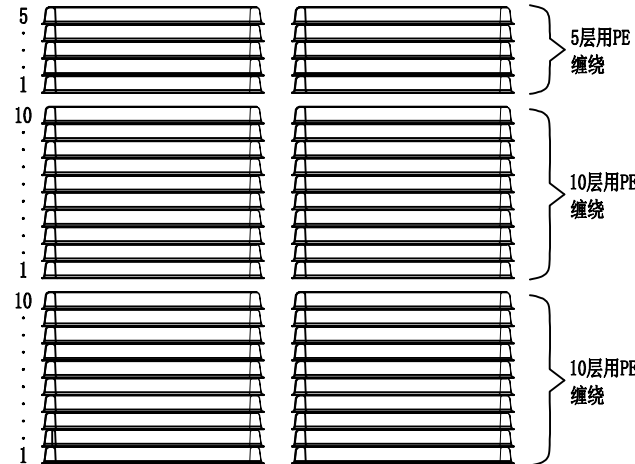

装箱方式示意图: 25层 5000PCS
前20层每10层用PE膜缠绕, 后5层用PE膜缠绕

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.*	± 3"
.X	± 0.20	.X*	± 2"
.XX	± 0.10	.XX*	± 1"

Website: www.bsc-elec.com
E-mail: bestcreate@bsc-elec.com

DESIGN: I.L
DATE: 2025.02.25

CHECKED: C.W
DATE: 2025.02.25

APPROVED: C.W
DATE: 2025.02.25

TITLE: USB 2.0A/F 90° 插件式弯脚 (15.2)
插板有卷DIP

MATERIAL:	PART NO: U04-AFXXXR-031	SIZE: A4
FINISH:	DWG NO: U04-AFXXXR-031	SHEET: 2 OF 2