

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES:

- 1.CURRENT RATING: 1.5A AMP
- 2.CONTACT RESISTANCE: 20mΩ MAX
- 3.INSULATION RESISTANCE:1000MΩ MIN
4. WITHSTANDING VOLTAGE: 1000V AC FOR 1MIN
- 5.TEMPERATURE:-40°C ~ +105°C

MATERIAL:

- 1.HOUSING: THERMOPLASTIC, UL94V-0
- 2.TERMINAL: BRASS
- 3.FINISH:SEE ORDERING INFORMATION

PART NO. INFORMATION

BH01 - M X F XX T - 0003 - X

GENDER
M: FEMALE

CONTACT PLATED

- 1: GOLD FLASH
- 2: GOLD 3U"
- 3: GOLD 5U"
- 4: GOLD 10U"
- 5: GOLD 15U"
- 6: GOLD 30U"

PACKAGE
T: TRAY

PIN NUMBER
26-64P

HOUSING MATERIAL
F: PA66 BLACK

DIP
1:2.5MM 2:2.6MM
3:3.1MM 4:3.2MM
5:3.5MM

PIN NUMBER

POLES	Dimension			POLES	Dimension		
	A(mm)	B(mm)	C(mm)		A(mm)	B(mm)	C(mm)
04	12.58	10.48	2.54	24	37.98	35.88	27.94
06	15.12	13.02	5.08	26	40.52	38.42	30.48
08	17.66	15.56	7.62	30	45.60	43.50	35.56
10	20.20	18.10	10.16	34	50.68	48.58	40.64
12	22.74	20.64	12.70	40	58.30	56.20	48.26
14	25.28	23.18	15.24	44	63.38	61.28	53.34
16	27.82	25.72	17.78	50	71.00	68.90	60.96
18	30.36	28.26	20.32	60	83.70	81.60	73.66
20	32.90	30.80	22.86	64	88.78	86.68	78.74

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.30	X.*	± 3°
.X	± 0.20	.X*	± 2°
.XX	± 0.15	.XX*	± 1°

Website: www.bsc-elec.com

E-mail: bestcreate@bsc-elec.com

DESIGN: I. L DATE: 2017. 3. 1




CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE:

2.54MM BOX HEADER MALE DIP TYPE 180°

MATERILA:	PART NO: BH01-MXFXXT-0003-X	SIZE: A4
FINISH:	DWG NO: BH01-MXFXXT-0003-X	SHEET: 1 OF 2

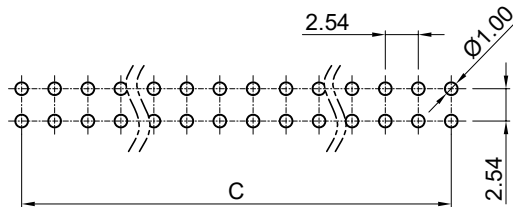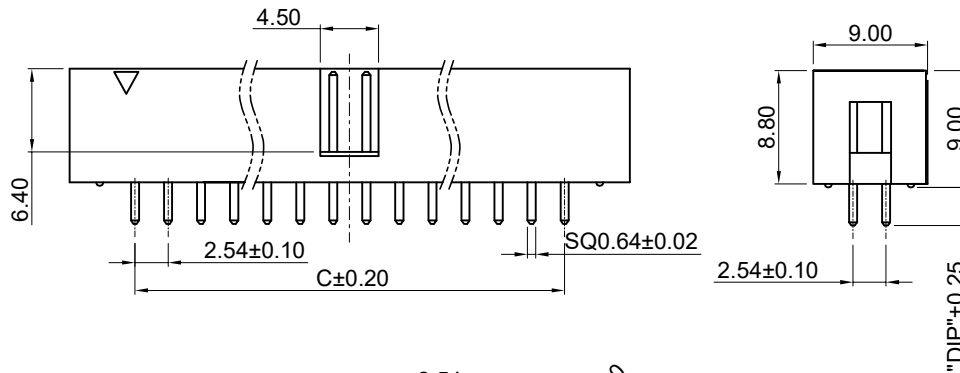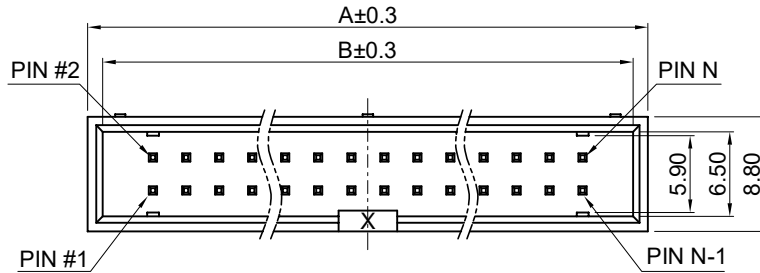

P.C.B. LAYOUT(TOP VIEW)

TOLERANCE:±0.05

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN






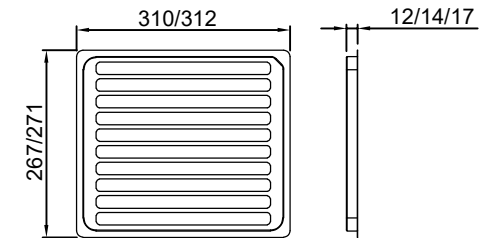


TABLE: 4

DIP=2.6-3.1MM SERIES				DIP=3.2-3.5MM SERIES			
TRAY SIZE:L=312*W=271*H=12 MM				TRAY SIZE:L=310*W=267*H=17 MM			
P/N: P-A001				P/N: P-A071			
TRAY SIZE:L=310*W=267*H=14 MM				P/N: P-A070			
POLES	QUANTITY			POLES	QUANTITY		
	PCS/TRAY	TRAY/CARTON	PCS/CARTON		PCS/TRAY	TRAY/CARTON	PCS/CARTON
04	420	25	10500	04	420	20	8400
06	340	25	8500	06	340	20	6800
08	300	25	7500	08	300	20	6000
10	260	25	6500	10	260	20	5200
12	220	25	5500	12	220	20	4400
14	200	25	5000	14	200	20	4000
16	180	25	4500	16	180	20	3600
18	160	25	4000	18	160	20	3200
20	160	25	4000	20	160	20	3200
24	120	25	3000	24	120	20	2400
26	120	25	3000	26	120	20	2400
30	100	25	2500	30	100	20	2000
34	100	25	2500	34	100	20	2000
40	80	25	2000	40	80	20	1600
44	80	25	2000	44	80	20	1600
50	60	25	1500	50	60	20	1200
60	60	25	1500	60	60	20	1200
64	40	25	1000	64	40	20	800

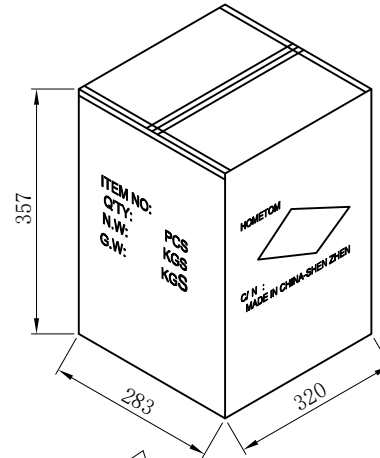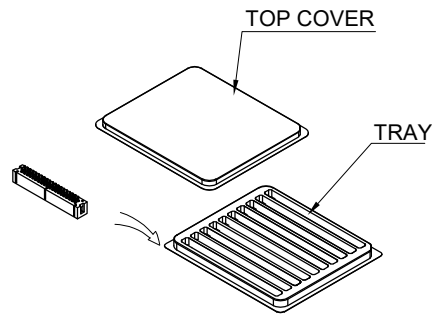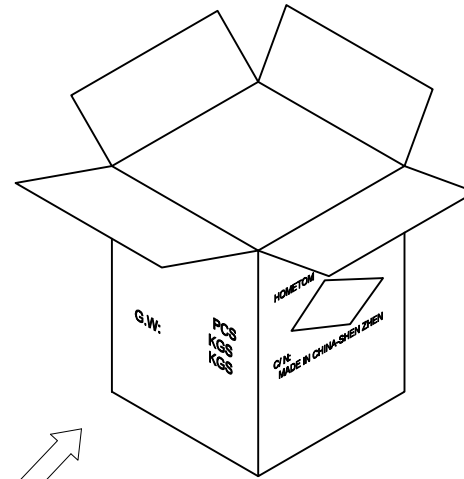

XX TRAY:
SEE TABLE: 4



Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.30	X.*	± 3°
.X	± 0.20	.X.*	± 2°
.XX	± 0.15	.XX.*	± 1°

Website: www.bsc-elec.com
E-mail: bestcreate@bsc-elec.com

DESIGN: I. L
DATE: 2017. 3. 1

CHECKED: C. W
DATE: 2017. 3. 1

APPROVED: C. W
DATE: 2017. 3. 1

TITLE: 2.54MM BOX HEADER MALE DIP TYPE 180°

MATERILA:	PART NO: BH01-MXFXXT-0003-X	SIZE: A4
FINSH:	DWG NO: BH01-MXFXXT-0003-X	SHEET: 2 OF 2

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------