

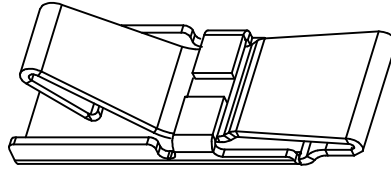
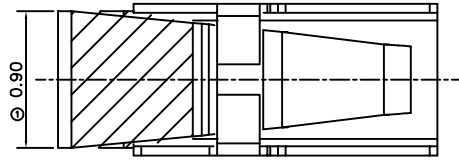
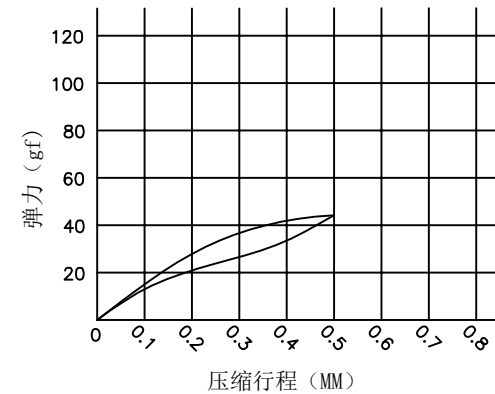
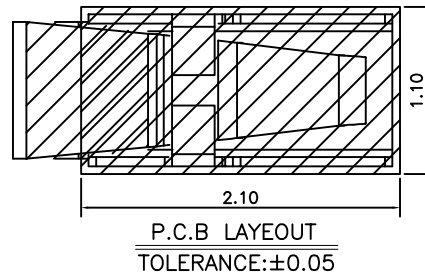
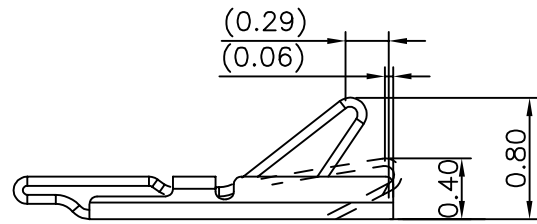


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN



- 1.MATERIAL SPECIFICATION:
 1.1.STAINLESS STEEL SUS-301 T=0.06±0.005MM
 2.TEST REQUIREMENTS:
 2.1.CONTACT RESISTANCE: 80mΩ MAX
 2.2.VOLTAGE RATING: 1.5 V/AC/DC/MAX
 2.3.RATED CURRENT: 1.0A/MAX
 2.4.WELDING THRUST: ≥3.0 Kg
 2.5.DURABILITY: 1,500 TIMES
 2.6.OPERATING TEMPERATURE: -20 ° ~ 80 ° C
 3.PLATING REQUIREMENTS:
 3.1.OVERALL NICKEL PLATING 50U MIN,
 WELDING SURFACE 1U MIN GOLD PLATING,
 CONTACT AREA 1U MIN GOLD PLATING
 3.2.SALT SPRAY TEST TO MEET THE REQUIREMENTS OF 24 HOURS.
 3.3.TERMINAL TO EAT FULL TIN, NOT PEELING, WELDING,
 OBVIOUS COLOR AND OTHER ADVERSE
 3.4.ROHS, REACH, HF HALOGEN-FREE AND A SERIES
 OF DOMESTIC AND INTERNATIONAL ENVIRONMENTAL
 REQUIREMENTS

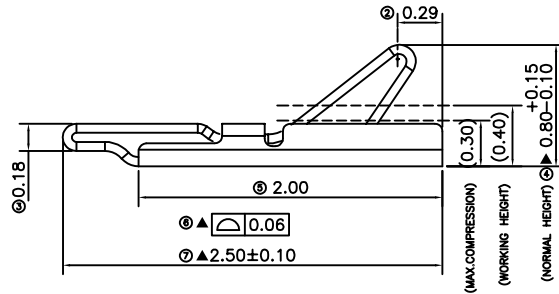

STATE AT WORKING
 HEIGHT 0.4MM

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.25	X.*	± 3'
.X	± 0.20	.X'	± 2'
.XX	± 0.15	.XX'	± 1'

Website:www.bsc-elec.com
 Email:bestcreate@bsc-elec.com

DESIGN: I.L DATE: 2017.3.1

CHECKED: C.W DATE: 2017.3.1

APPROVED: C.W DATE: 2017.3.1

TITLE: Antenna Shrapnel Connector
 2.50*1.00*0.80H(A TYPE)

MATERIAL: PART NO: AS-R5-098-0008A SIZE: A4

FINISH: DWG NO: AS-R5-098-0008A

REV:	UNIT	SCALE	QUALITY SYMBOLS
A	mm	1=1	