

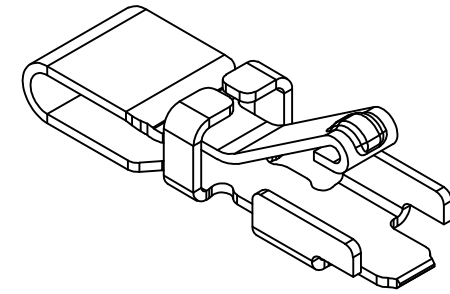
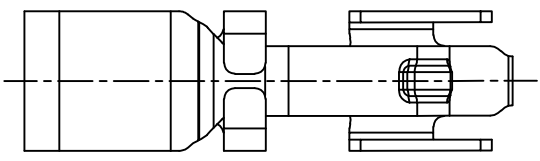
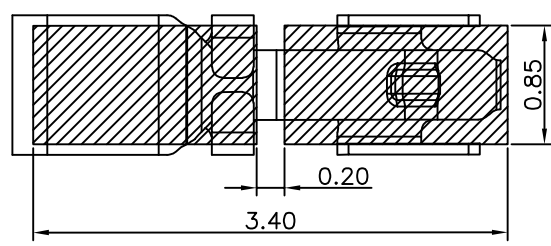
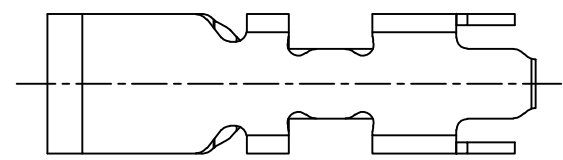


RoHS Compliant


REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN



- 1.MATERIAL SPECIFICATION:
  - 1.1.STAINLESS STEEL T=0.10±0.005MM
- 2.TEST REQUIREMENTS:
  - 2.1.CONTACT RESISTANCE: 80mΩ MAX
  - 2.2.VOLTAGE RATING: 1.5 V/AC/DC/MAX
  - 2.3.RATED CURRENT: 1.0A/MAX
  - 2.4.WELDING THRUST: ≥3.0 Kg
  - 2.5.DURABILITY: 1,500 TIMES
  - 2.6.OPERATING TEMPERATURE: -20 ° ~ 80 ° C
- 3.PLATING REQUIREMENTS:
  - 3.1.OVERALL NICKEL PLATING 50U MIN, WELDING SURFACE 1U MIN GOLD PLATING, CONTACT AREA 1U MIN GOLD PLATING
  - 3.2.SALT SPRAY TEST TO MEET THE REQUIREMENTS OF 24 HOURS.
  - 3.3.TERMINAL TO EAT FULL TIN, NOT PEELING, WELDING, OBVIOUS COLOR AND OTHER ADVERSE
  - 3.4.ROHS, REACH, HF HALOGEN-FREE AND A SERIES OF DOMESTIC AND INTERNATIONAL ENVIRONMENTAL REQUIREMENTS

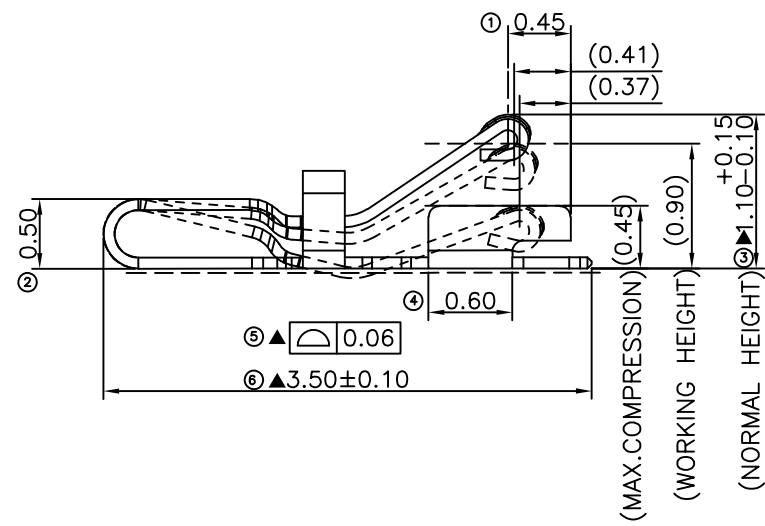

P.C.B LAYOUT  
TOLERANCE:±0.05

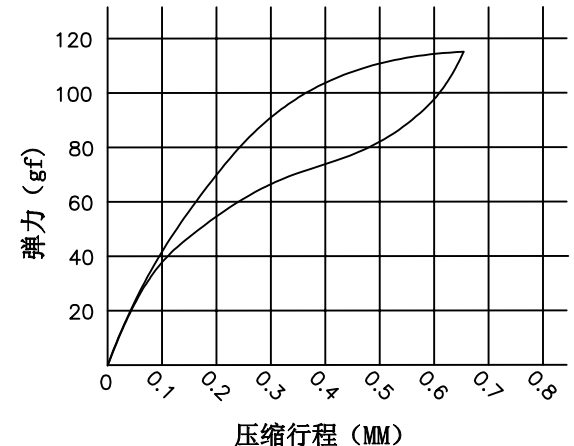

**Bestcreate Technology Limited**

REV: A	UNIT: mm	SCALE: 1=1	QUALITY SYMBOLS:
--------	----------	------------	------------------

TOLERANCES UNLESS OTHERWISE SPECIFIED:			
X.	± 0.25	X.*	± 3'
.X	± 0.20	.X'	± 2'
.XX	± 0.15	.XX'	± 1'
Website:www.bsc-elec.com			
Email:bestcreate@bsc-elec.com			

DESIGN: I. L	DATE: 2017. 3. 1
CHECKED: C. W	DATE: 2017. 3. 1
APPROVED: C. W	DATE: 2017. 3. 1

TITLE: Antenna Shrapnel Connector 3.5*1.0*1.1H(F TYPE)		
MATERIAL: FINISH:	PART NO: AS-R5-098-0011F	SIZE: A4
	DWG NO: AS-R5-098-0011F	