
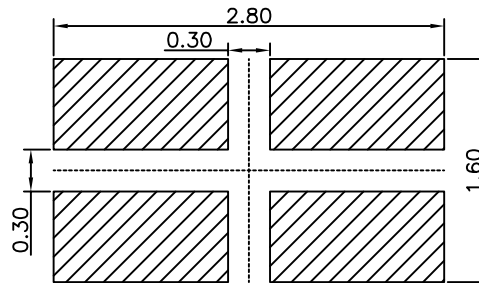
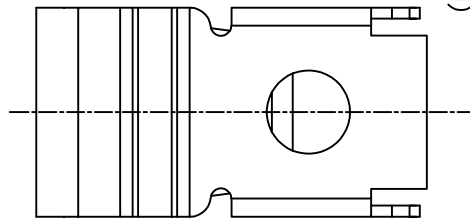

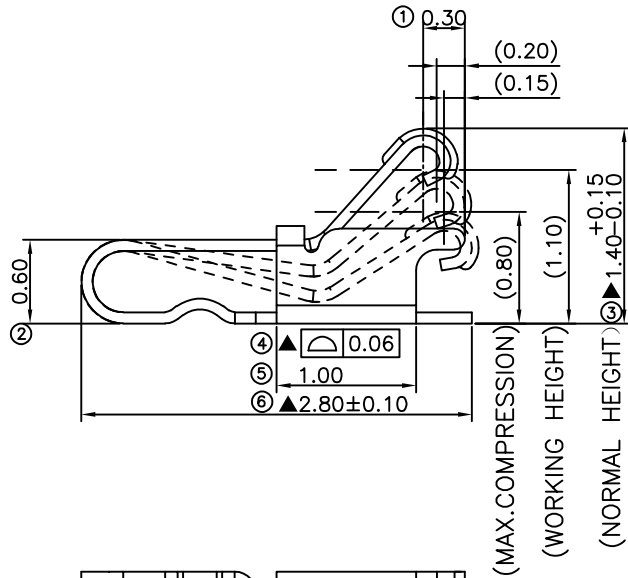
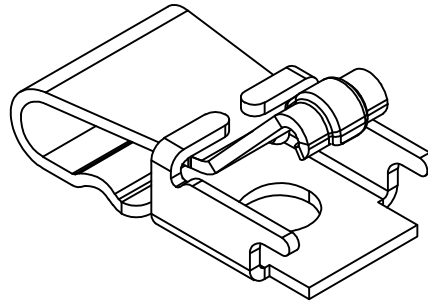



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

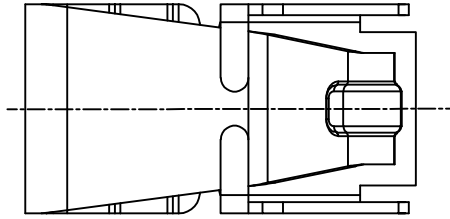

P.C.B LAYOUT  
TOLERANCE:±0.05

- 1.MATERIAL SPECIFICATION:  
1.1.STAINLESS STEEL SUS-304 T=0.10±0.005MM
- 2.TEST REQUIREMENTS:  
2.1.CONTACT RESISTANCE: 80mΩ MAX  
2.2.VOLTAGE RATING: 1.5 V/AC/DC/MAX  
2.3.RATED CURRENT: 1.0A/MAX  
2.4.WELDING THRUST: ≥3.0 Kg  
2.5.DURABILITY: 1,500 TIMES  
2.6.OPERATING TEMPERATURE: -20 ° ~ 80 ° C
- 3.PLATING REQUIREMENTS:  
3.1.OVERALL NICKEL PLATING 50U MIN,  
WELDING SURFACE 1U MIN GOLD PLATING,  
CONTACT AREA 1U MIN GOLD PLATING  
3.2.SALT SPRAY TEST TO MEET THE REQUIREMENTS OF 24 HOURS.  
3.3.TERMINAL TO EAT FULL TIN, NOT PEELING, WELDING,  
OBVIOUS COLOR AND OTHER ADVERSE  
3.4.ROHS, REACH, HF HALOGEN-FREE AND A SERIES  
OF DOMESTIC AND INTERNATIONAL ENVIRONMENTAL  
REQUIREMENTS

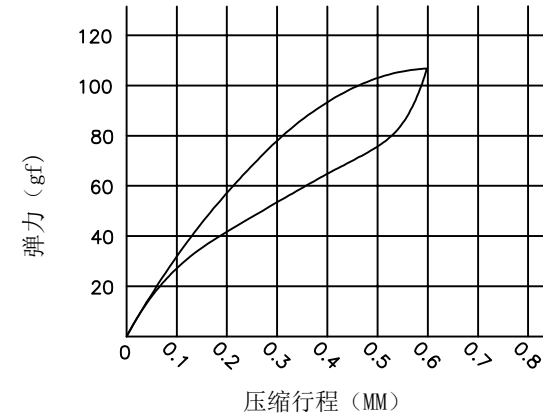

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.25	X.*	± 3'
.X	± 0.20	.X'	± 2'
.XX	± 0.15	.XX'	± 1'

Website:www.bsc-elec.com  
Email:bestcreate@bsc-elec.com

DESIGN: I.L DATE: 2017. 3. 1

CHECKED: C.W DATE: 2017. 3. 1

C.W DATE: 2017. 3. 1

APPROVED: C.W DATE: 2017. 3. 1

C.W DATE: 2017. 3. 1

TITLE: Antenna Shrapnel Connector  
2.80\*1.50\*1.40H(A TYPE)

MATERIAL: AS-R5-098-0014A PART NO: AS-R5-098-0014A SIZE: A4

FINISH: AS-R5-098-0014A DWG NO: AS-R5-098-0014A

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------