


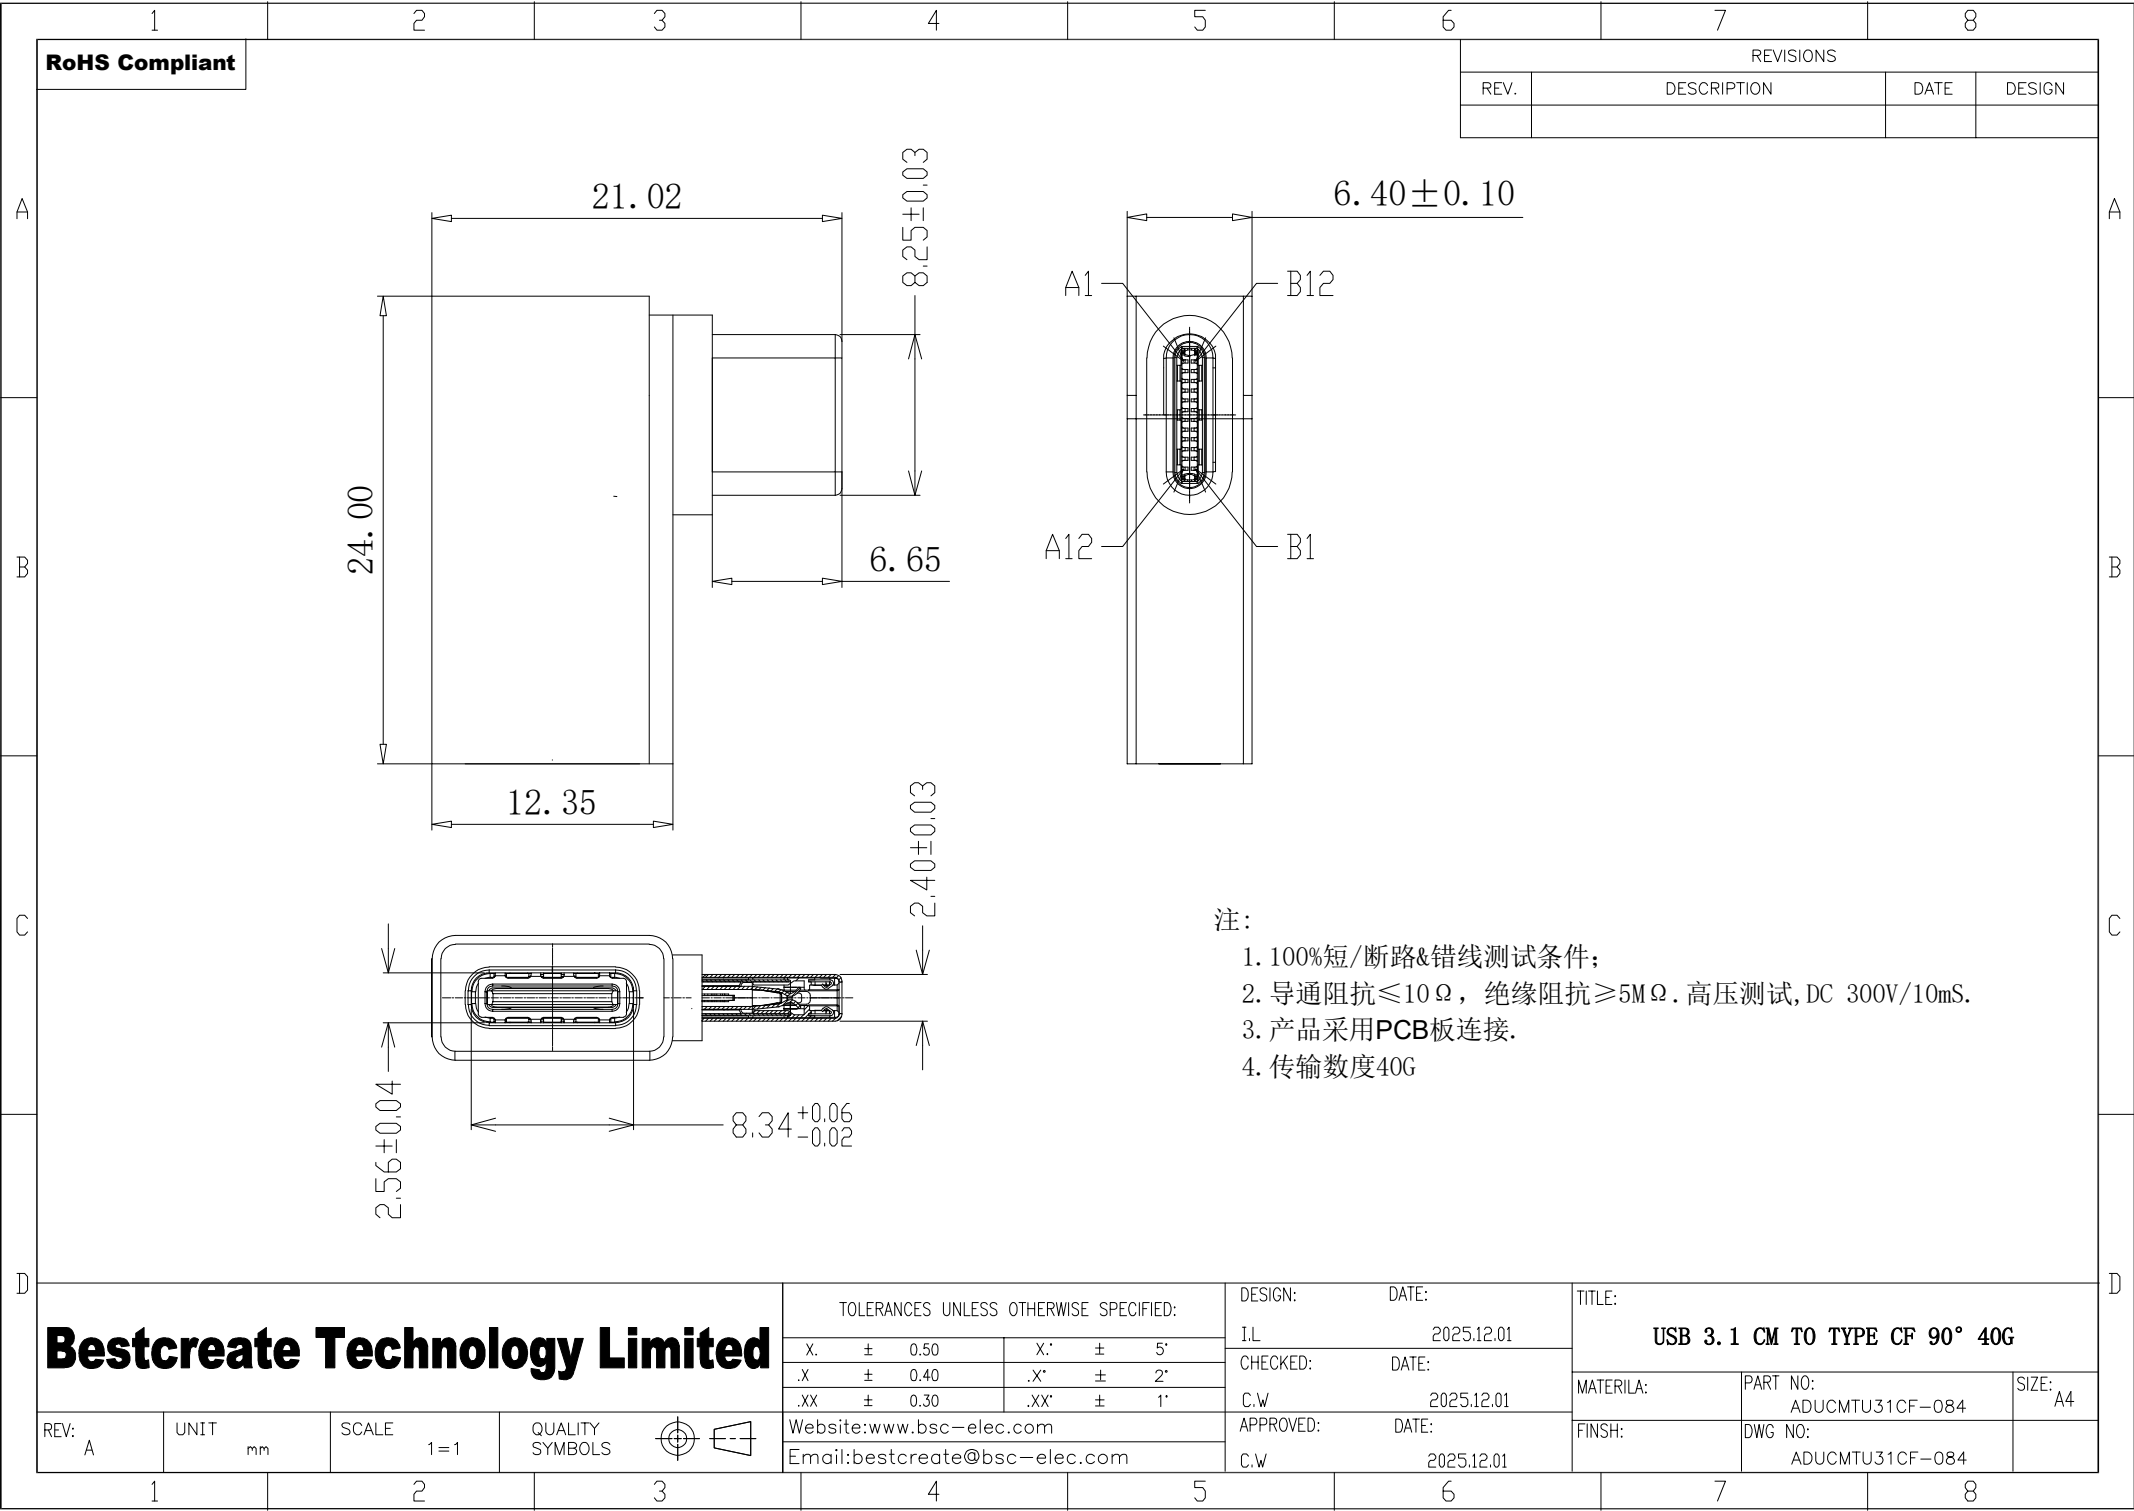

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

- 注：
- 1. 100%短/断路&错线测试条件；
 - 2. 导通阻抗 $\leq 10\Omega$ ，绝缘阻抗 $\geq 5M\Omega$. 高压测试, DC 300V/10mS.
 - 3. 产品采用PCB板连接.
 - 4. 传输数度40G

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:				DESIGN:		DATE:		TITLE:		
X.	±	0.50	X.*	±	5*	I.L		USB 3.1 CM TO TYPE CF 90° 40G		
.X	±	0.40	.X*	±	2*	CHECKED:				
.XX	±	0.30	.XX*	±	1*	C.W		MATERILA:	PART NO:	SIZE:
Website:www.bsc—elec.com				APPROVED:		DATE:		FINSH:	DWG NO:	
Email:bestcreate@bsc—elec.com				C.W		2025.12.01			ADUCMTU31CF—084	A4