

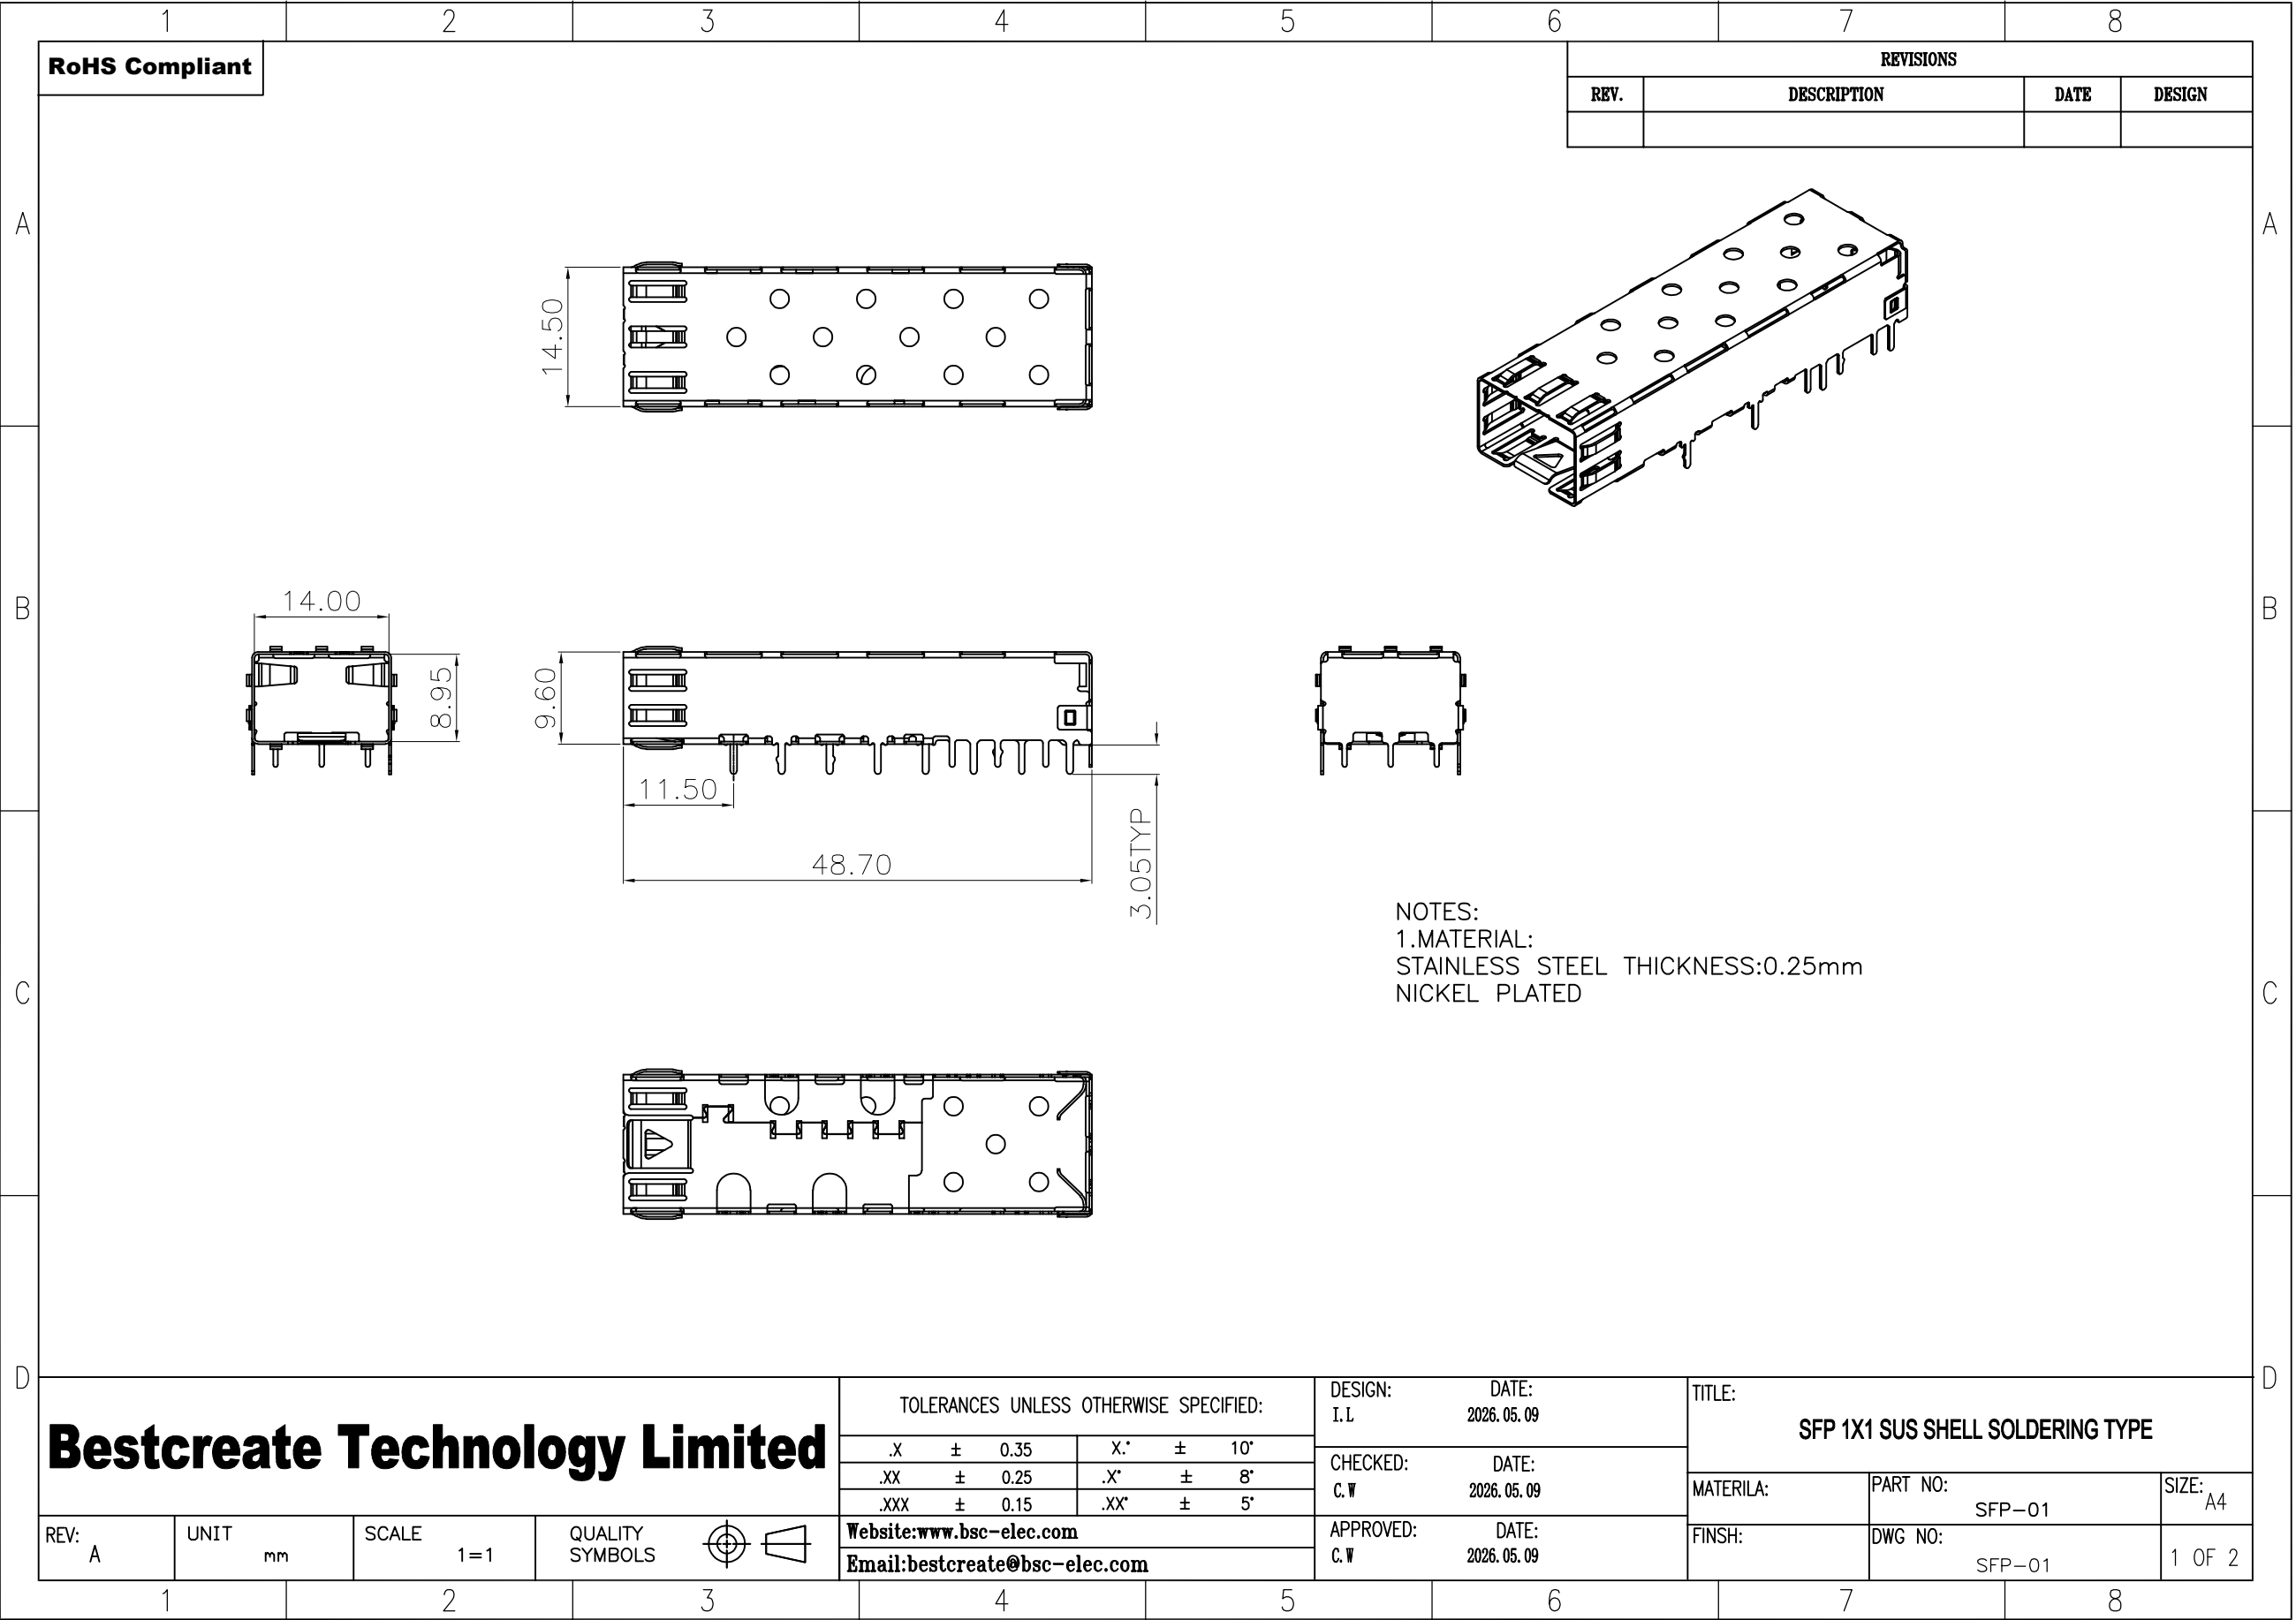

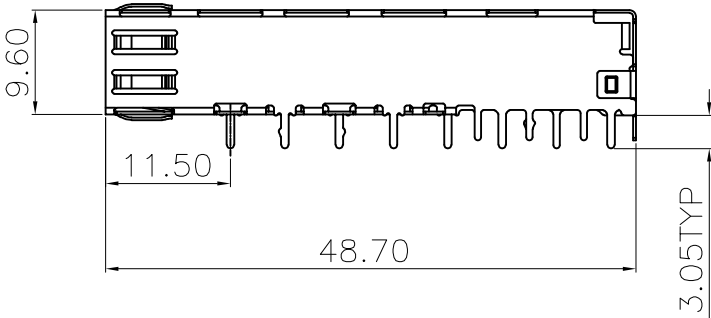




RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

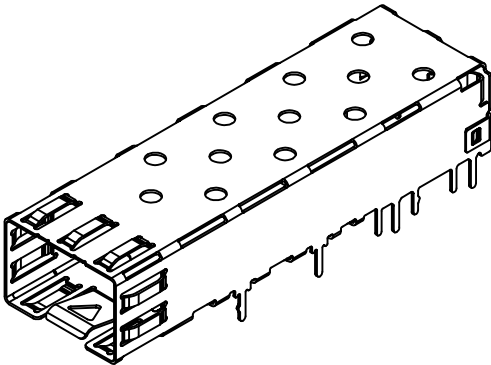

NOTES:
1.MATERIAL:
STAINLESS STEEL THICKNESS:0.25mm
NICKEL PLATED

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:			
.X	±	0.35	X.* ± 10'
.XX	±	0.25	.X* ± 8'
.XXX	±	0.15	.XX* ± 5'

DESIGN: I.L	DATE: 2026.05.09
CHECKED: C.W	DATE: 2026.05.09
APPROVED: C.W	DATE: 2026.05.09



TITLE: SFP 1X1 SUS SHELL SOLDERING TYPE		
MATERILA:	PART NO: SFP-01	SIZE: A4
FINSH:	DWG NO: SFP-01	1 OF 2

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
-----------	------------	--------------	------------------------


Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

RoHS Compliant


REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

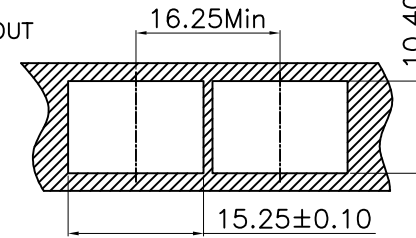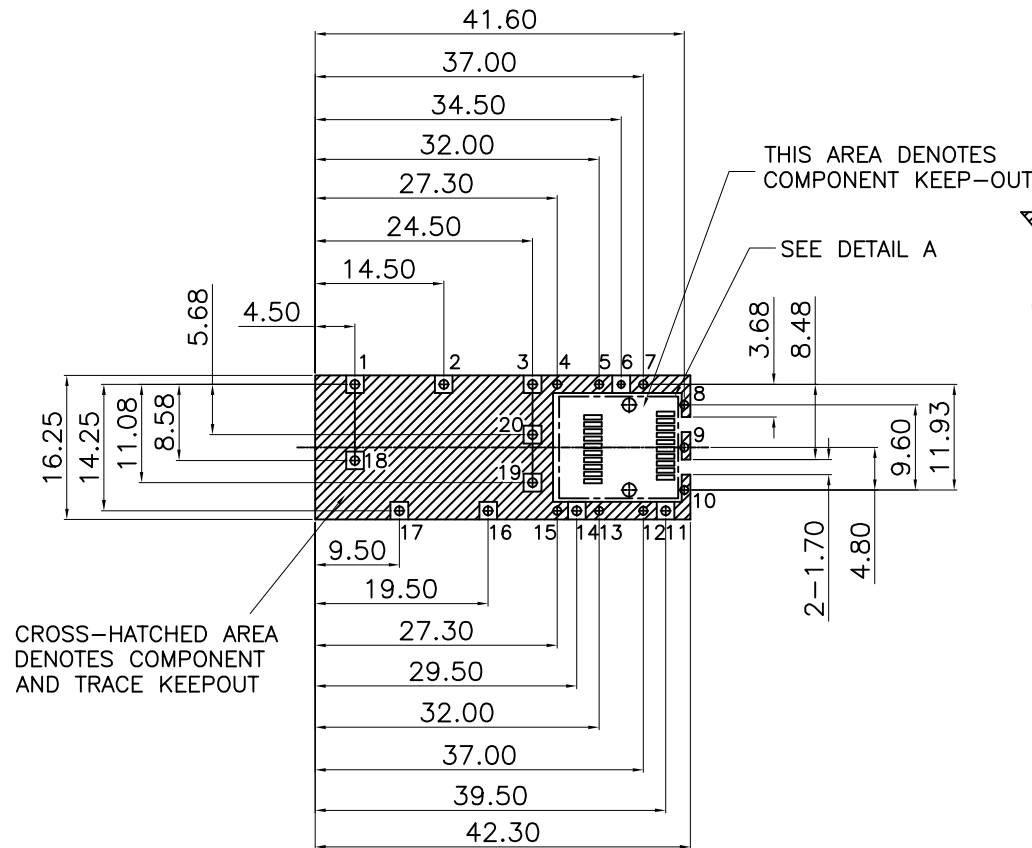

BEZEL
RECOMMENDED BEZEL
THICKNESS:0.80~2.60mm



BEZEL OPENING
BELOW TOP OF PCB

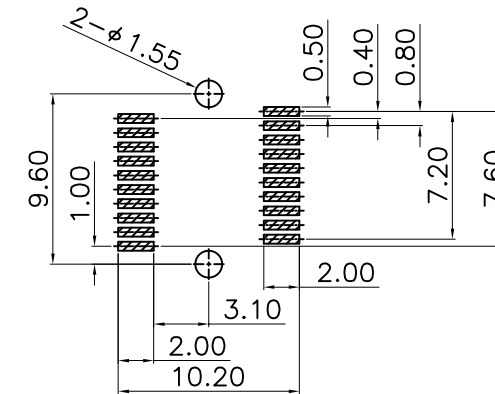

DETAIL A(SCALE 2:1)

1. RECOMMENDED PCB THICKNESS:2.36
(MINIMUM PCB THICKNESS:1.57)
(ALL TOLERANCES ARE 0.05)

- 1,2,3,11,14,16,17,18,19,20# φ 1.05mm;
4,5,7,8,9,10,12,13,15# φ 0.95mm;
6# φ 0.85mm;

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.35	.X"	±	10"
.XX	±	0.25	.X"	±	8"
.XXX	±	0.15	.XX"	±	5"

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN: I.L
DATE: 2026.05.09

CHECKED: C.V
DATE: 2026.05.09

APPROVED: C.V
DATE: 2026.05.09

TITLE:

SFP 1X1 SUS SHELL SOLDERING TYPE

MATERIAL:

PART NO: SFP-01

SIZE: A4

FINISH:

DWG NO: SFP-01

2 OF 2

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS

