


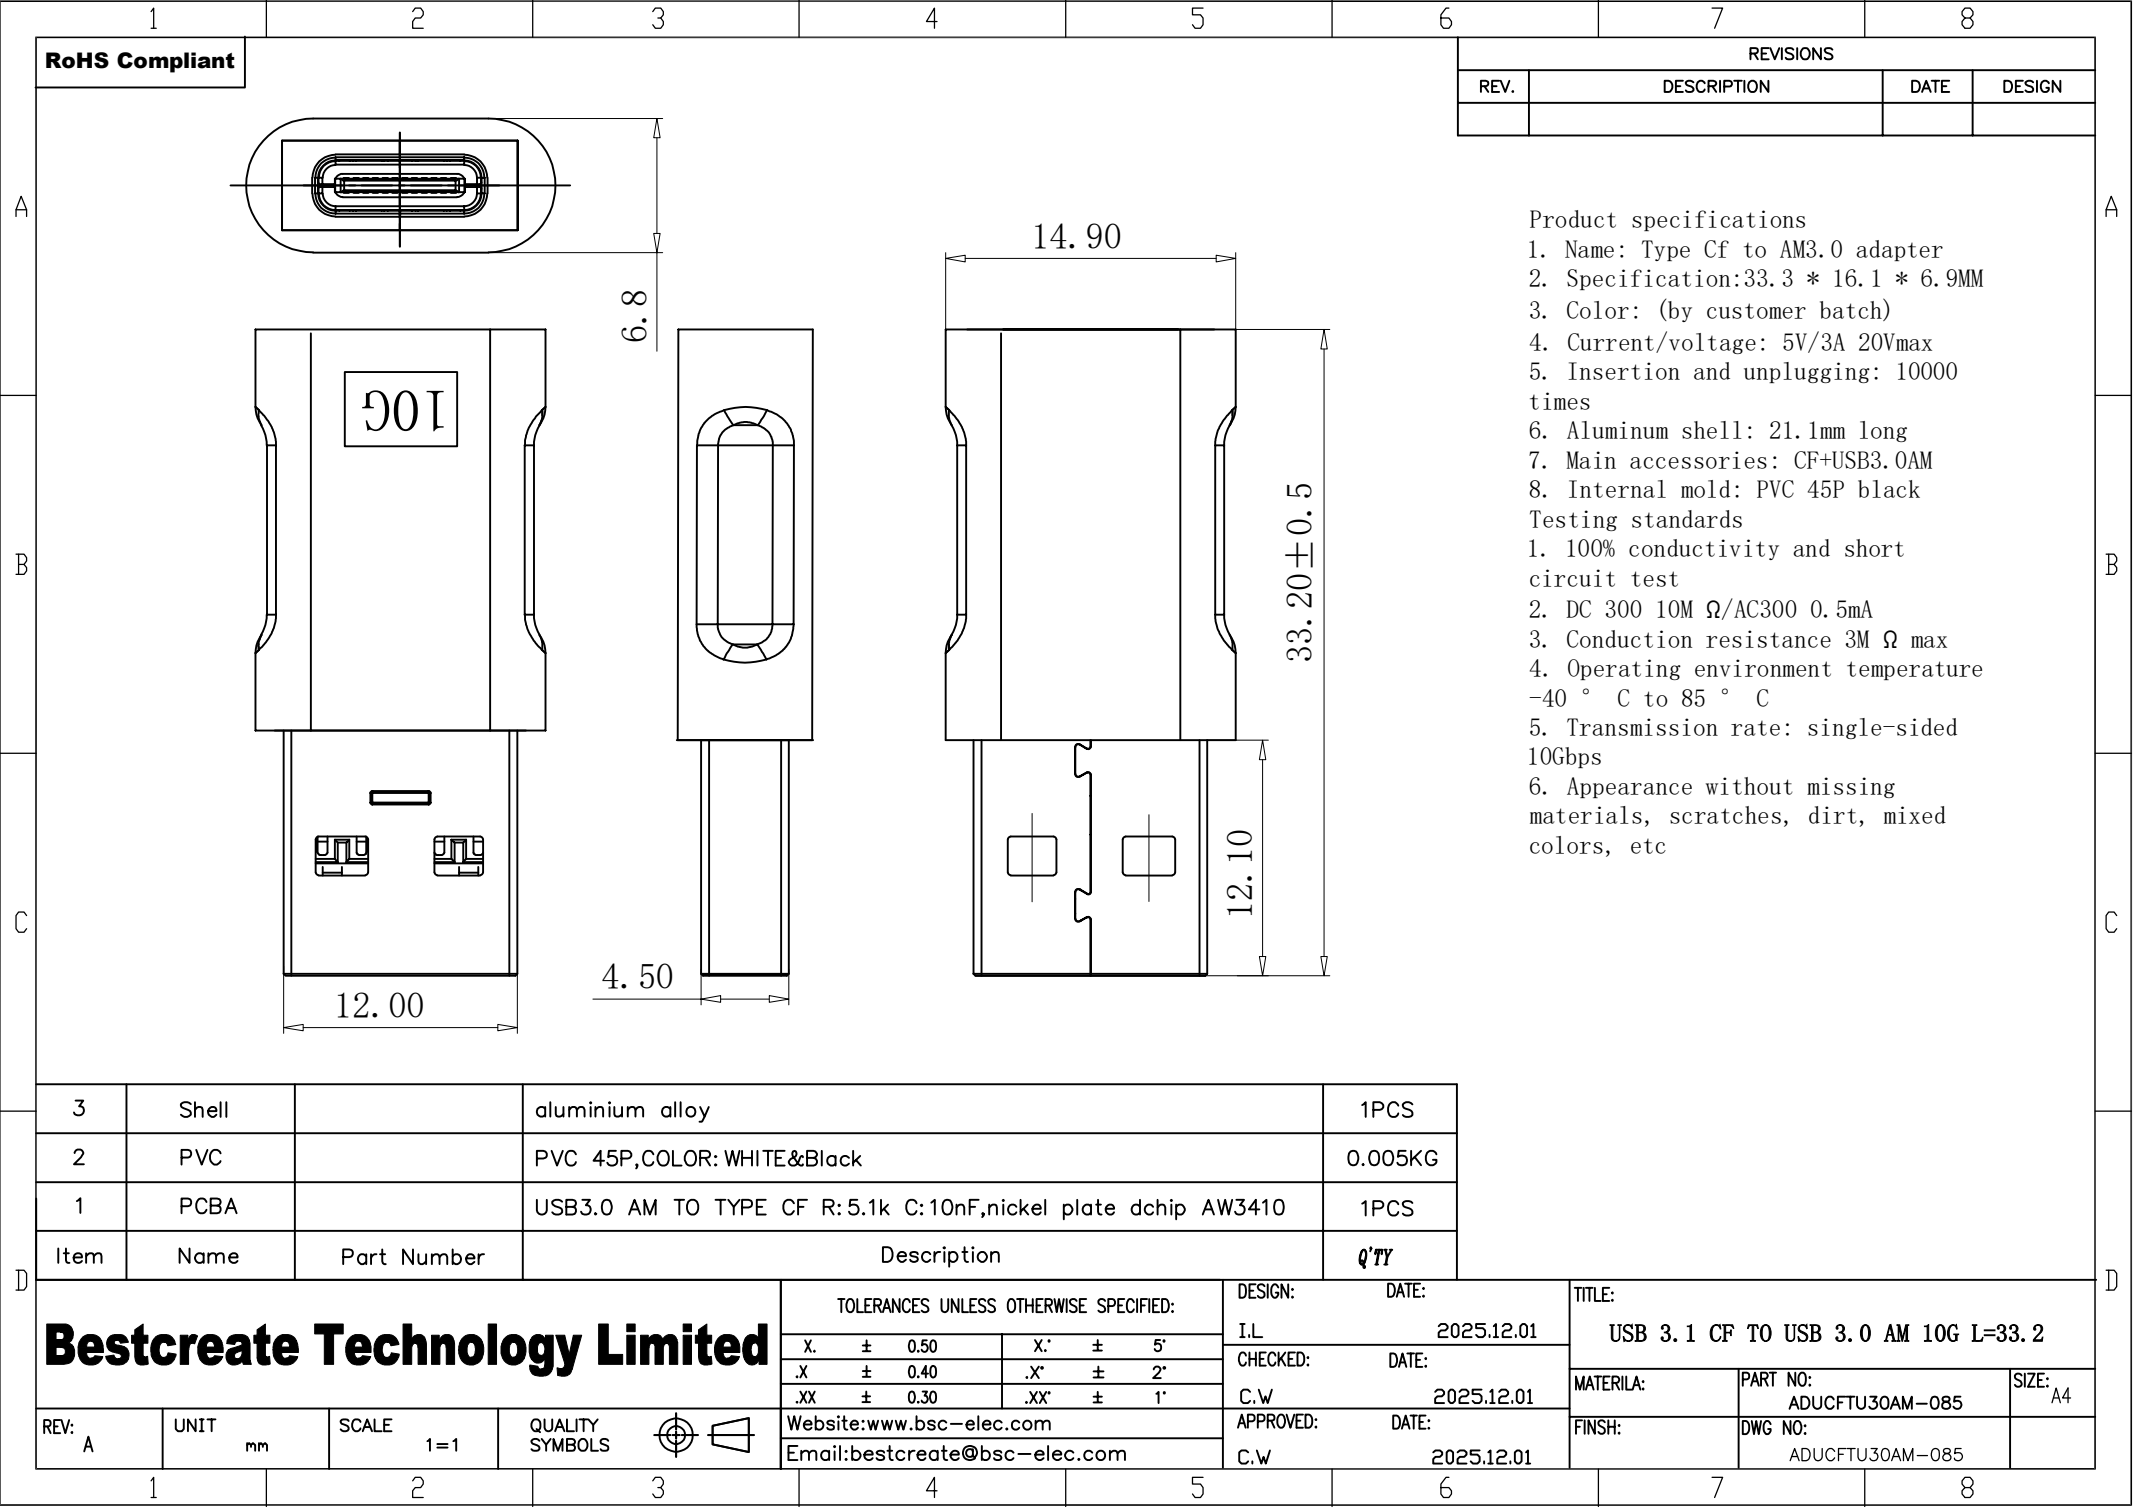

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

Product specifications

- 1. Name: Type Cf to AM3.0 adapter
- 2. Specification:33.3 * 16.1 * 6.9MM
- 3. Color: (by customer batch)
- 4. Current/voltage: 5V/3A 20Vmax
- 5. Insertion and unplugging: 10000 times
- 6. Aluminum shell: 21.1mm long
- 7. Main accessories: CF+USB3.0AM
- 8. Internal mold: PVC 45P black

Testing standards

- 1. 100% conductivity and short circuit test
- 2. DC 300 10M Ω/AC300 0.5mA
- 3. Conduction resistance 3M Ω max
- 4. Operating environment temperature -40 ° C to 85 ° C
- 5. Transmission rate: single-sided 10Gbps
- 6. Appearance without missing materials, scratches, dirt, mixed colors, etc

3	Shell		aluminium alloy	1PCS
2	PVC		PVC 45P,COLOR: WHITE&Black	0.005KG
1	PCBA		USB3.0 AM TO TYPE CF R:5.1k C:10nF,nickel plate dchip AW3410	1PCS
Item	Name	Part Number	Description	Q'TY

Bestcreate Technology Limited			TOLERANCES UNLESS OTHERWISE SPECIFIED:		DESIGN:	DATE:	TITLE:		
			X. ± 0.50	X' ± 5'	I.L	2025.12.01	USB 3.1 CF TO USB 3.0 AM 10G L=33.2		
			.X ± 0.40	.X' ± 2'	CHECKED:	DATE:	MATERILA:	PART NO:	SIZE:
			.XX ± 0.30	.XX' ± 1'	C.W	2025.12.01	FINSH:	ADUCFTU30AM-085	A4
REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS	Website:www.bsc-elec.com		APPROVED:	DATE:	DWG NO:	
				Email:bestcreate@bsc-elec.com		C.W	2025.12.01	ADUCFTU30AM-085	