

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES:

ELECTRICAL SPECIFICATION

OPERATION VOLTAGE:100V AC MAX.

CURRENT RATING:1.5 AMPERE PER CONTACT.

CONTACT RESISTANCE: 30mΩ Max.

DIELECTRIC WITHSTANDING VOLTAGE:500V AC.

ENVIRONMINTAL

OPERATING TEMPERATURE:-50°C TO +125°C.

MATERIAL





HOUSING: THERMOPLASTIC, UL 94V- 0

COVER:THERMOPLASTIC, UL 94V- 0

CONTACT:COPPER.

PLATING: GOLD PLATING OVER NICKEL ON CONTACT AREA, TIN

PLATING ON SOLDER TAIL.

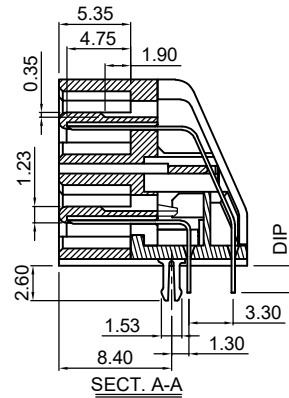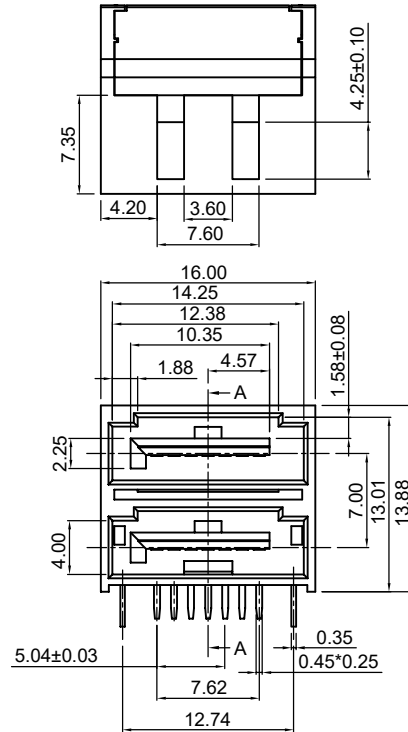

PART NO. INFORMATION

S140 - M X B 3 T - 001 - X

GENDER
F: FEMALE
M: MALE

CONTACT PLATED
1: GOLD FLASH
2: 15U" GOLD

PACKAGE
T: TRAY
R:TAPE REEL

HOUSING COLOR
1:WHITE 2:BLUE
3:ORANGE 4:GRAY
5:BLACK 6:RED
7:YELLOW

HOUSING MATERIAL
B: PA66

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.30	X.*	± 2'
.X	± 0.25	.X*	± 1'
.XX	± 0.20	.XX*	± 0.5'

Website: www.bsc-elec.com

E-mail: bestcreate@bsc-elec.com

DESIGN:

I. L

DATE:

2017. 3. 1

CHECKED:

C. W

DATE:

2017. 3. 1

APPROVED:

C. W

DATE:

2017. 3. 1

TITLE:

DUAL SATA 14P MALE CONNECTOR 1.27MM R/A

MATERILA:

FINSH:

PART NO:

S140-MXB3T-001-X

DWG NO:


S140-MXB3T-001-X

SIZE:

A4

SHEET:

1 OF 2

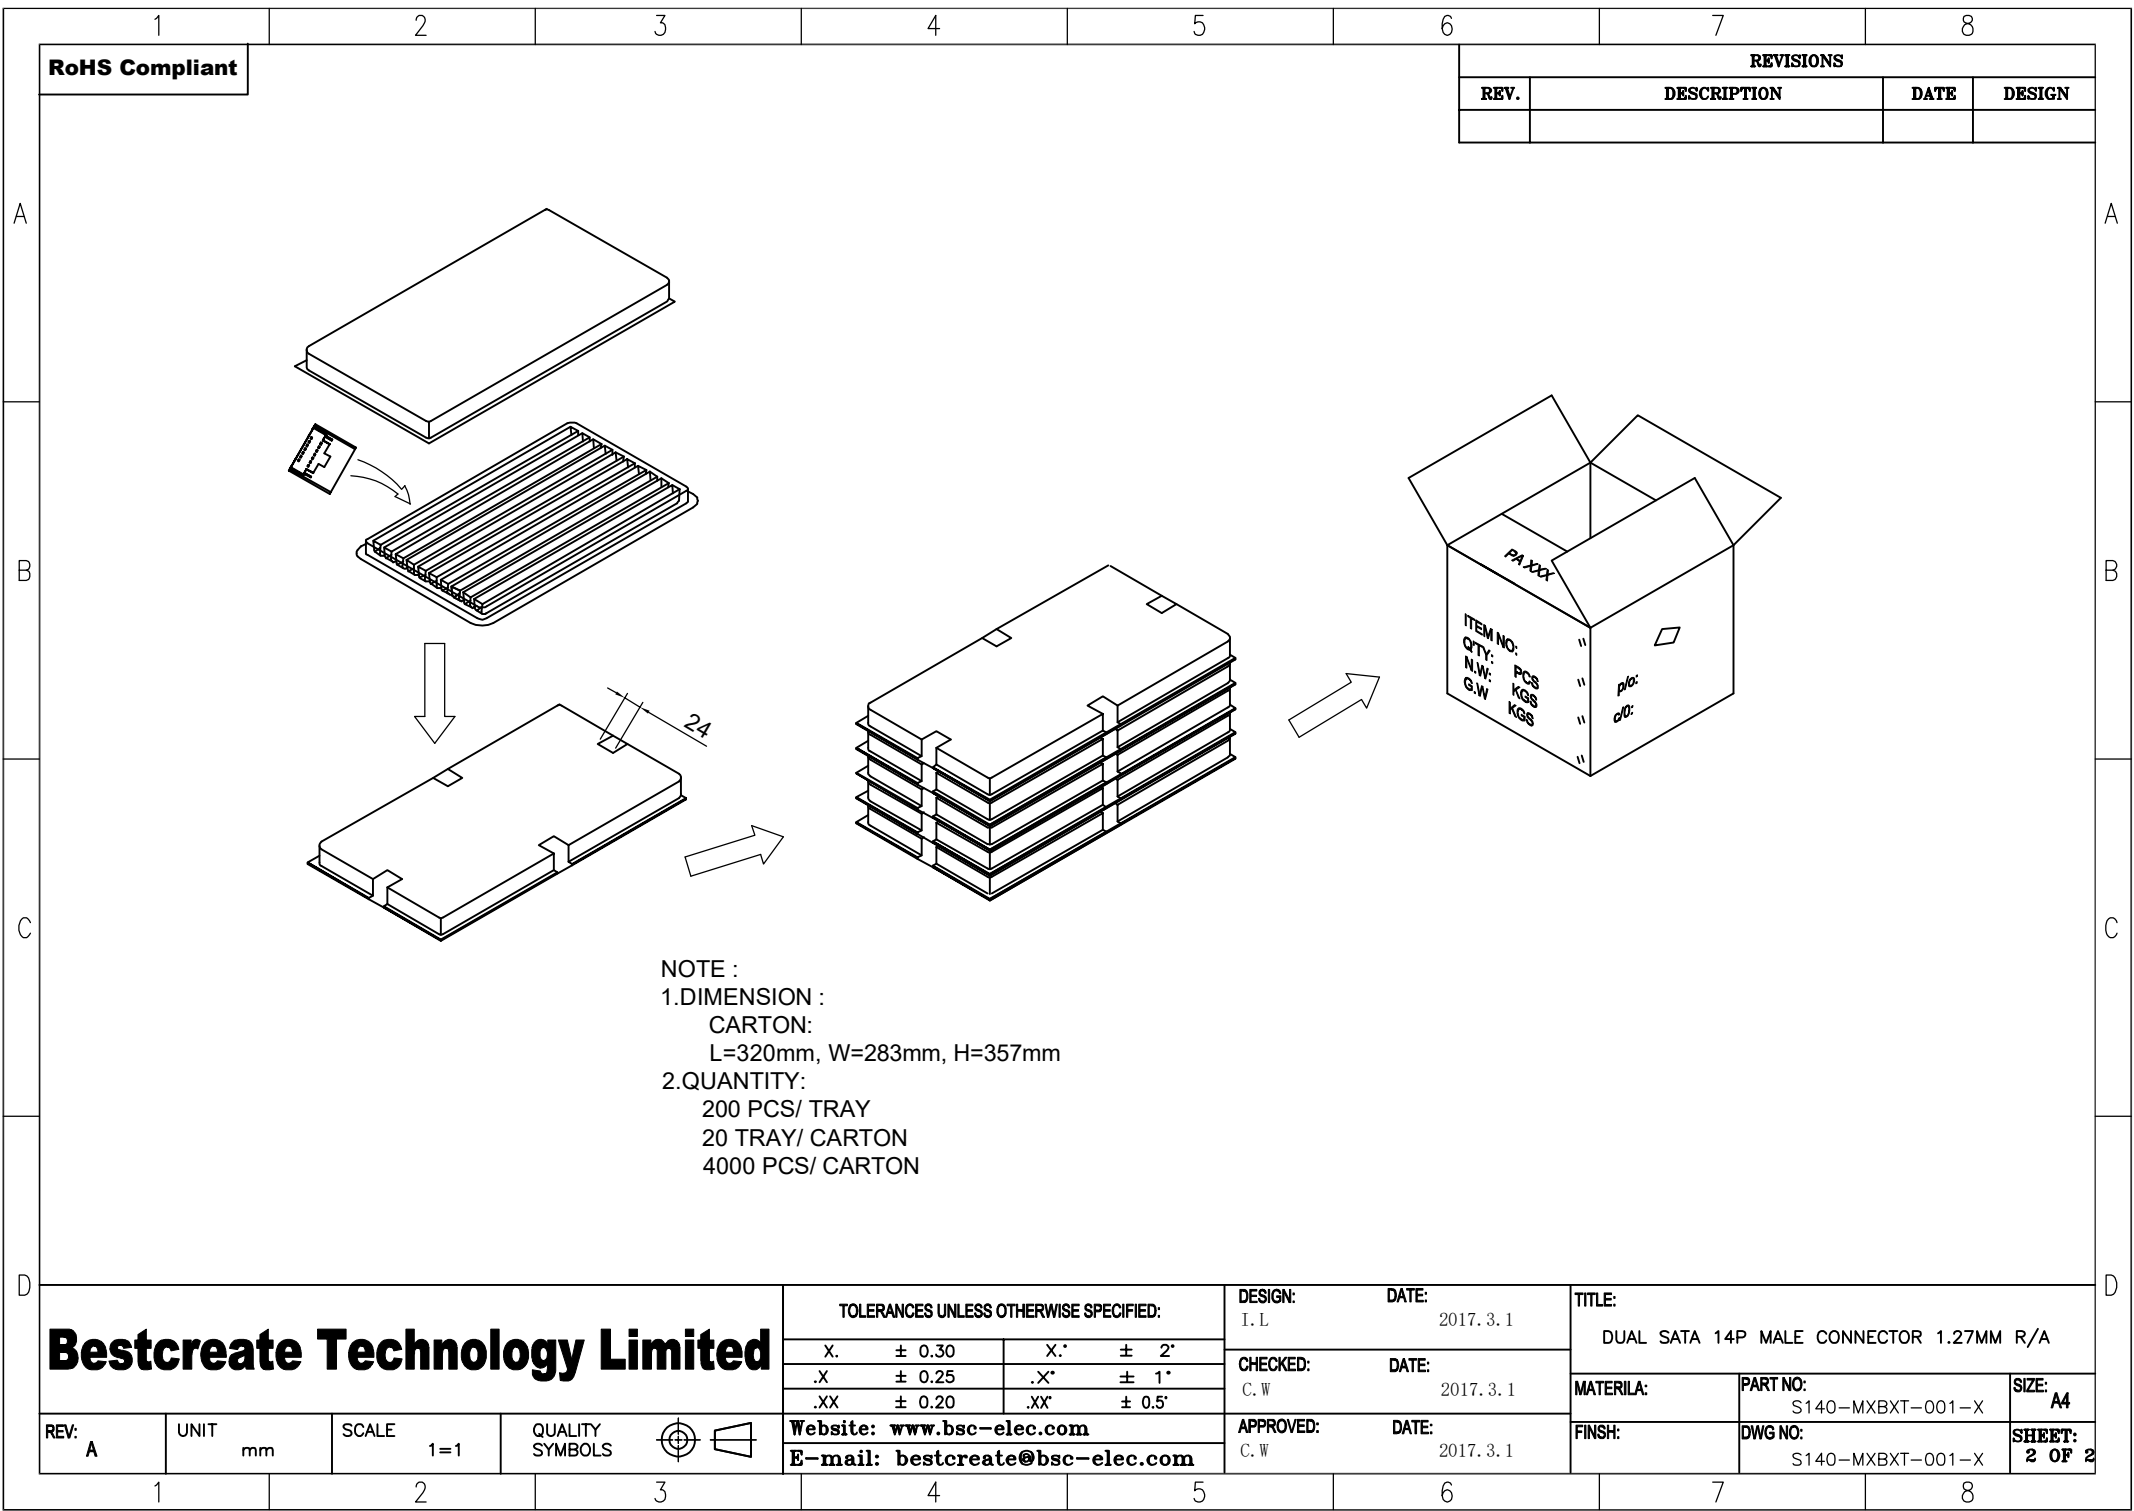

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

NOTE :
1.DIMENSION :
CARTON:
L=320mm, W=283mm, H=357mm
2.QUANTITY:
200 PCS/ TRAY
20 TRAY/ CARTON
4000 PCS/ CARTON

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DESIGN: I. L	DATE: 2017. 3. 1	TITLE: DUAL SATA 14P MALE CONNECTOR 1.27MM R/A		
X. ± 0.30	X.* ± 2"	CHECKED: C. W	DATE: 2017. 3. 1	MATERILA:	PART NO: S140-MXBXT-001-X	SIZE: A4
.X ± 0.25	.X.* ± 1"			FINSH:	DWG NO: S140-MXBXT-001-X	SHEET: 2 OF 2
.XX ± 0.20	.XX* ± 0.5"					
Website: www.bsc-elec.com		APPROVED:	DATE: 2017. 3. 1			
E-mail: bestcreate@bsc-elec.com		C. W				

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------