







RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES:

- 1) MATERIAL:
1-1 HOUSING: THERMOPLASTIC LCP UL 94V-0, COLOR: WHITE
1-2 CONTACT: SUS304 T=0.10mm
- 2) FINISH:
CONTACT: OVERALL NICKEL PLATING 50U MIN,
WELDING SURFACE 1U MIN GOLD PLATING,
CONTACT AREA 1U MIN GOLD PLATING
- 3) PRODUCT SPECIFICATIONS;
3-1 VOLTAGE RATING: 30V
3-2 CURRENT RATING: 0.5A
3-3 CONTACT RESISTANCE; 30 milliohm(Initial) Max.
3-4 INSULATION RESISTANCE: 100 MEGOHM Min.
3-5 OPERATION TEMPERATURE: -25° TO +85°
3-6 CONTACT NORMAL FORCE 40~80gf

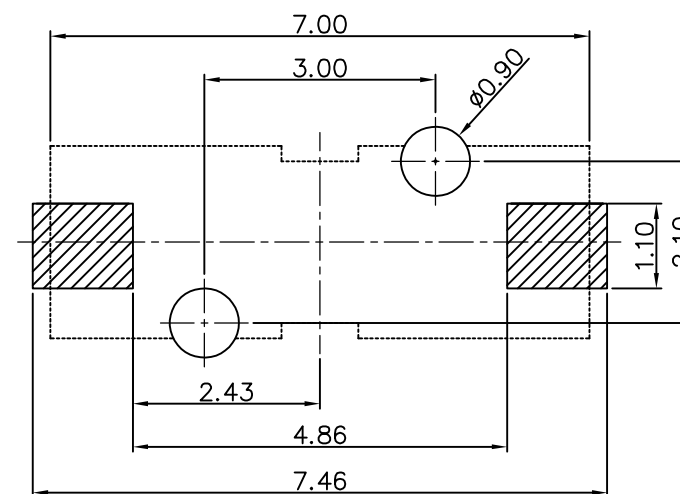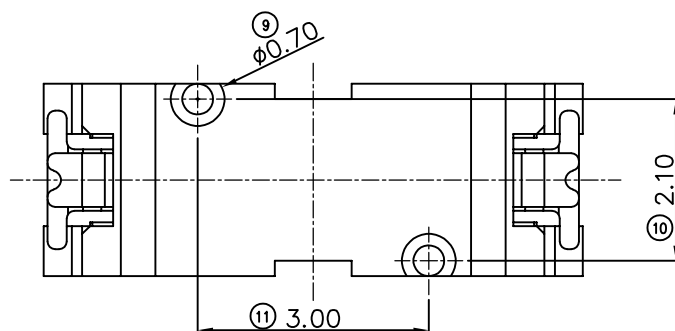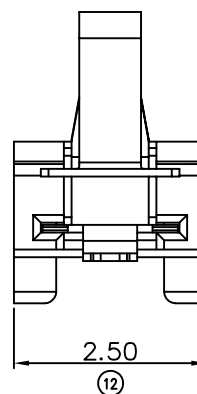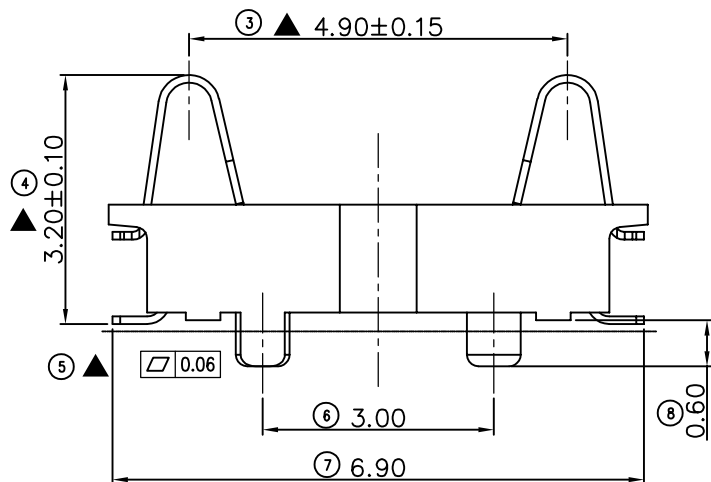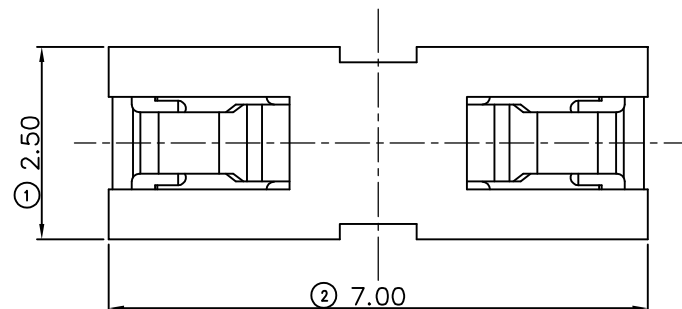

Recommended PCB board layout
Size tolerance: ± 0.05

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.25	X.*	±	3'
.X	±	0.20	.X*	±	2'
.XX	±	0.15	.XX*	±	1'

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: I. L
DATE: 2017. 3. 1
CHECKED: C. W
DATE: 2017. 3. 1
APPROVED: C. W
DATE: 2017. 3. 1

TITLE: 2PIN Battery holder shrapnel
(3.2H) forward column(B TYPE)

MATERIAL: FINISH:	PART NO: AS-R5-098-0032B DWG NO: AS-R5-098-0032B	SIZE: A4
-------------------	---	----------

REV: A	UNIT: mm	SCALE: 1=1	QUALITY SYMBOLS
--------	----------	------------	-----------------