




RoHS Compliant

REVISIONS



REV.	DESCRIPTION	DATE	DESIGN



Ø1.00(PICK&PLACE AREA)

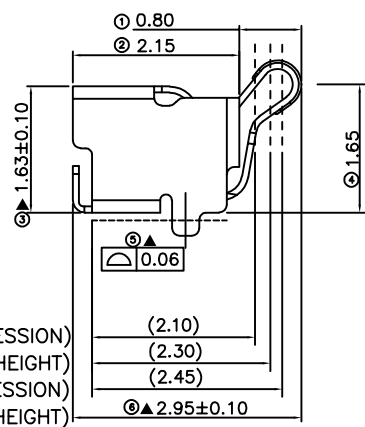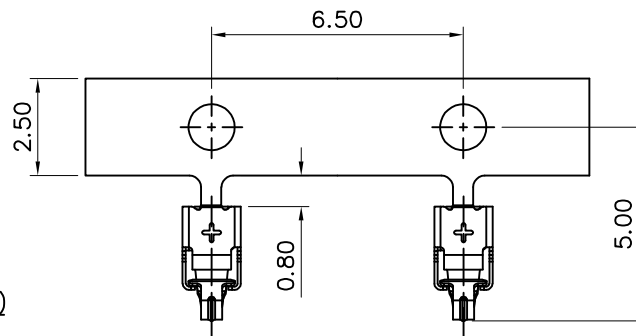

(MAX.COMPRESSION)
(WORKING HEIGHT)
(MIN.COMPRESSION)
(NORMAL HEIGHT)



1.MATERIAL SPECIFICATION:

1.1.STAINLESS STEEL SUS-301 T=0.08±0.005MM

2.TEST REQUIREMENTS:

2.1.CONTACT RESISTANCE: 80mΩ MAX

2.2.VOLTAGE RATING: 1.5 V/AC/DC/MAX

2.3.RATED CURRENT: 1.0A/MAX

2.4.WELDING THRUST: ≥3.0 Kg




2.5.DURABILITY: 1,500 TIMES

2.6.OPERATING TEMPERATURE: -20 ° ~ 80 ° C

3.PLATING REQUIREMENTS:

3.1.OVERALL NICKEL PLATING 50U MIN,
WELDING SURFACE 1U MIN GOLD PLATING,
CONTACT AREA 1U MIN GOLD PLATING

3.2.SALT SPRAY TEST TO MEET THE REQUIREMENTS OF 24 HOURS.

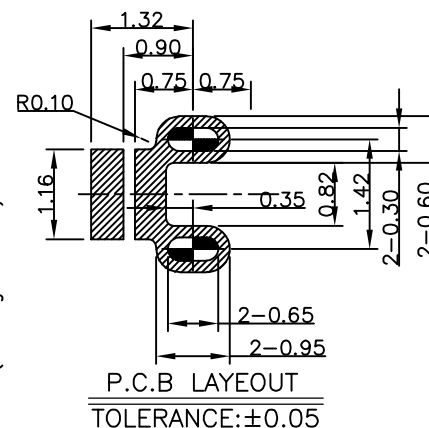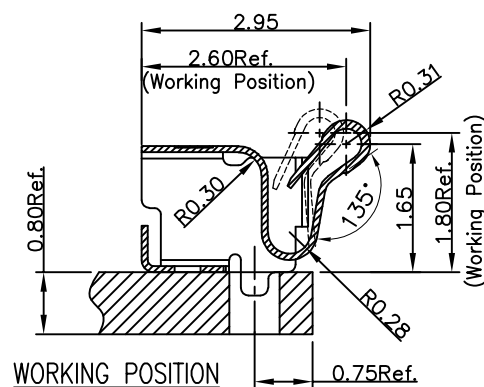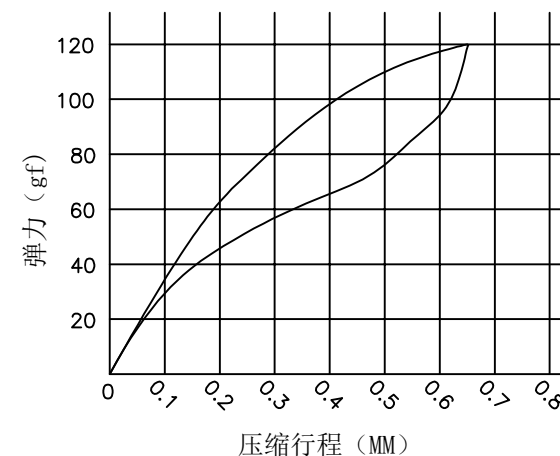3.3.TERMINAL TO EAT FULL TIN, NOT PEELING, WELDING,
OBVIOUS COLOR AND OTHER ADVERSE3.4.ROHS, REACH, HF HALOGEN-FREE AND A SERIES
OF DOMESTIC AND INTERNATIONAL ENVIRONMENTAL
REQUIREMENTS

P.C.B LAYOUT
TOLERANCE:±0.05

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.25	X.*	±	3'
.X	±	0.20	.X*	±	2'
.XX	±	0.15	.XX*	±	1'

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L

2017. 3. 1

CHECKED:

DATE:

C. W

2017. 3. 1

APPROVED:

DATE:

C. W

2017. 3. 1

TITLE:

H=1.6 ANTENNA SPRING
TERMINAL, SMT T=0.08MM

MATERILA:

PART NO:

AS-R5-098-0016C

SIZE:

A4

FINSH:

DWG NO:

AS-R5-098-0016C

REV:


A

UNIT

mm

SCALE

1=1

QUALITY
SYMBOLS

1

2

3

4

5

6

7

8