

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES:

1:MATERIAL

1-1: SUS-301 THICKNE=0.15MM

2:SPECIFICATIONS

2-1: RATED CURRENT: 1.0A

2-2: VOLTAGE RATING: 1.5V

2-3: CONTACT RESISTANCE: 80mΩ/MAX

2-4: CLAMPING FORCE: 60-120g

2-4: WELDING THRUST: ≥3KG



2-5: OPERATING TEMPERATURE: -40°C~+85°C

3:DURABILITY: 200 CYCLES





4:SALT SPRAY TIME: 24H

5:ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 50u" MIN

6:REQUIREMENTS

6-1:TERMINAL TO EAT FULL TIN,NOTPEELING,
WELDING OBVIOUS COLOR AND OTHED ADVERSE6-2:ROHS、REACH、HF HALOGER ADVERSE OF DOMESTIC
AND INTERNATIONAL ENVIRONMNTAL REQUIREMENTSØ1.20
Pick Up Area


3D View

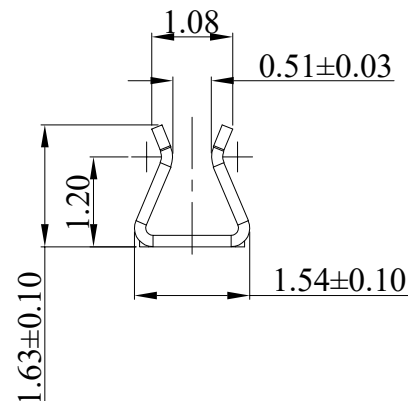

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)

Contact Area

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.25	X.*	±	3'
.X	±	0.20	.X*	±	2'
.XX	±	0.15	.XX*	±	1'

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L

2017. 3. 1

CHECKED:

DATE:

C. W

2017. 3. 1

APPROVED:

DATE:

C. W

2017. 3. 1

TITLE:

L2.90*W1.54*H1.63 Wire clip

MATERIAL:

PART NO:

AS-JS-CL-1004B

SIZE:

A4

FINISH:

DWG NO:

AS-JS-CL-1004B

REV:

A

UNIT

mm

SCALE

1=1

QUALITY
SYMBOLS