



RoHS Compliant

REVISIONS


REV.	DESCRIPTION	DATE	DESIGN

Ø0.50
Pick Up Area

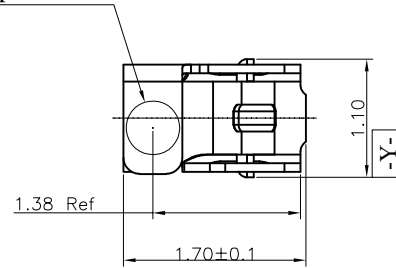


3D View

Contact Area

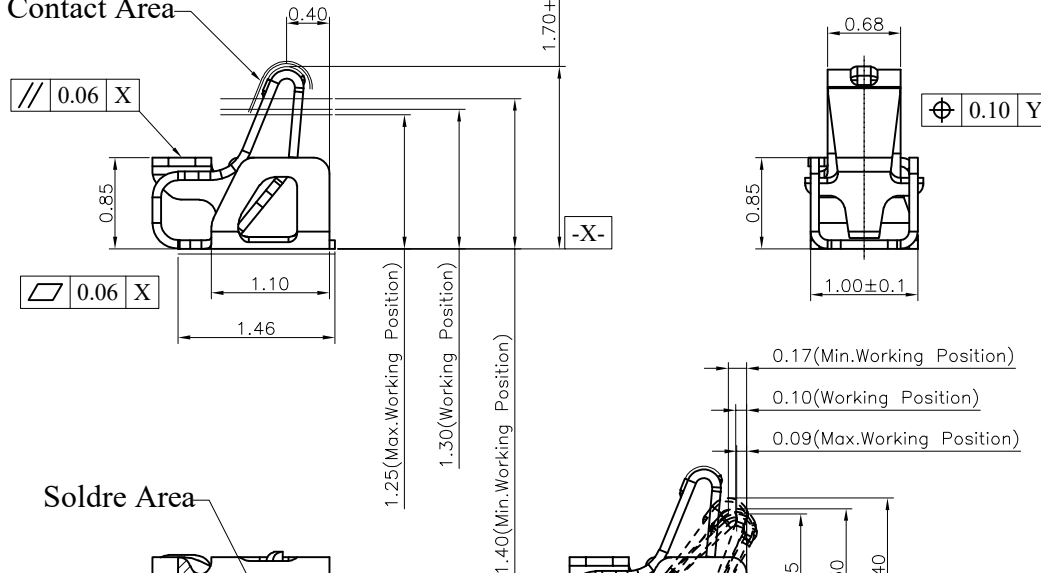

Soldre Area



(For Reference Only)
Stated At Compression

备注:

1: 材料

1-1:SUS-301厚度=0.08MM

2: 规格

2-1: 额定电流: 1.0A

2-2: 额定电压: 1.5V


2-3: 接触电阻: 80MΩ/最大

2-4: 焊接推力: ≥3KG


2-5: 工作温度: -40℃~+85℃

3: 耐用性: 1500次循环

4: 盐雾时间: 24小时

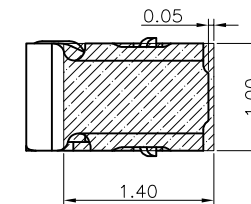

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)



METAL MASK T=0.08
TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.25	X.*	±	3"
.X	±	0.20	.X*	±	2"
.XX	±	0.15	.XX*	±	1"

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L
DATE: 2017. 3. 1

CHECKED: C. W
DATE: 2017. 3. 1

APPROVED: C. W
DATE: 2017. 3. 1

TITLE: Antenna Shrapnel Connector
1.7*1.0*1.7H(D TYPE)

MATERILA:	PART NO: AS-R5-098-0017D	SIZE: A4
FINSH:	DWG NO: AS-R5-098-0017D	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------