



RoHS Compliant

REVISIONS


REV.	DESCRIPTION	DATE	DESIGN




3D View

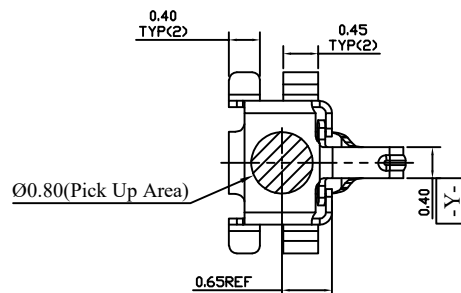






1.98(Min.Working Position)
1.88(Working Position)
1.78(Max.Working Position)



(For Reference Only)
Stated At Compression

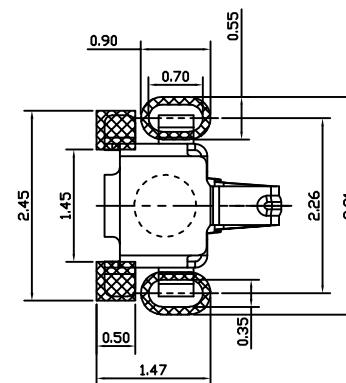

METAL MASK T=0.08
TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)

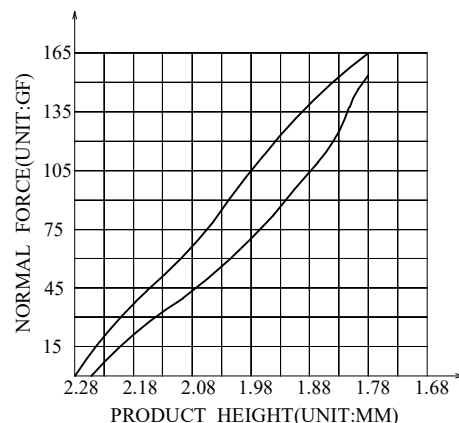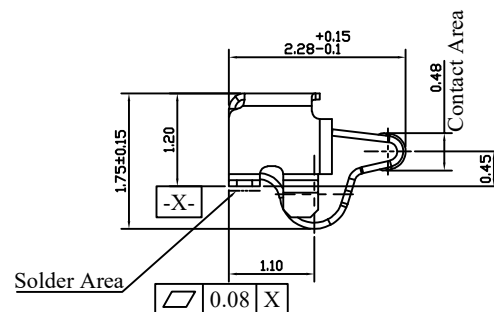

NOTES:

- 1:MATERIAL
1-1: SUS-301 THICKNE=0.08MM
- 2:SPECIFICATIONS
2-1: RATED CURRENT: 1.0A
2-2: VOLTAGE RATING: 1.5V
2-3: CONTACT RESISTANCE: 80mΩ/MAX
2-4: WELDING THRUST: ≥3KG
2-5: OPERATING TEMPERATURE: -40°C~+85°C
- 3:DURABILITY: 1500 CYCLES
- 4:SALT SPRAY TIME: 24H
- 5:ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 50u" MIN
- 6:REQUIREMENTS
6-1:TERMINAL TO EAT FULL TIN,NOTPEELING,
WELDING OBVIOUS COLOR AND OTHED ADVERSE
6-2:ROHS、REACH、HF HALOGER ADVERSE OF DOMESTIC
AND INTERNATIONAL ENVIRONMNTAL REQUIREMENTS

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.25	X.*	±	3'
.X	±	0.20	.X.*	±	2'
.XX	±	0.15	.XX.*	±	1'

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L
DATE: 2017. 3. 1

CHECKED: C. W
DATE: 2017. 3. 1

APPROVED: C. W
DATE: 2017. 3. 1

TITLE: Antenna Shrapnel Connector
2. 28*2. 34*2. 30H(F TYPE)

MATERILA:	PART NO: AS-R5-098-0023F	SIZE: A4
FINSH:	DWG NO: AS-R5-098-0023F	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
-----------	------------	--------------	--------------------