



RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

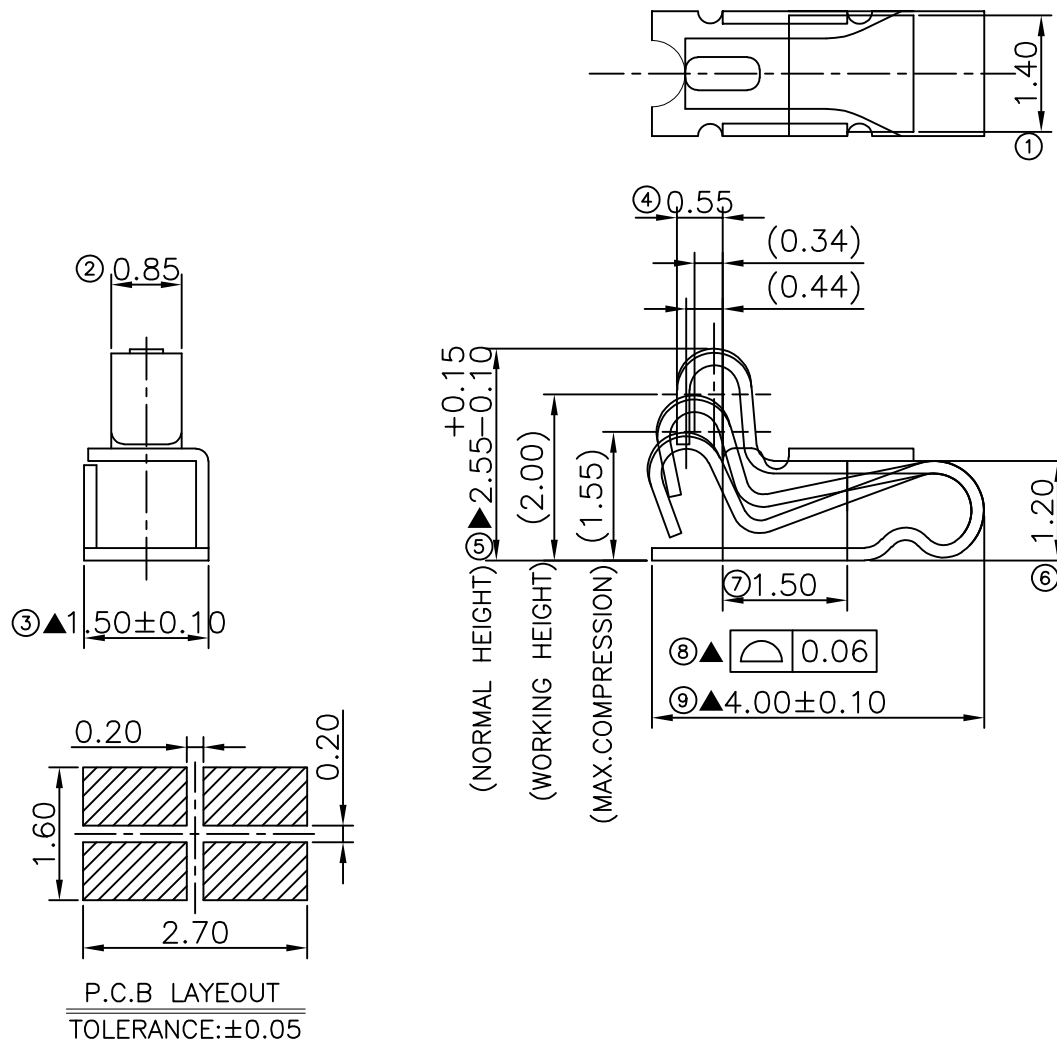

1. MATERIAL SPECIFICATION:
1.1. C5191 EH T=0.15±0.005MM
2. TEST REQUIREMENTS:
2.1. CONTACT RESISTANCE: 80MΩ MAX
2.2. VOLTAGE RATING: 1.5 V/AC/DC/MAX
2.3. RATED CURRENT: 1.0A/MAX
2.4. WELDING THRUST: ≥3.0 Kg
2.5. DURABILITY: 1,500 TIMES
2.6. OPERATING TEMPERATURE: -20 ° ~ 80 ° C
3. PLATING REQUIREMENTS:
3.1. OVERALL NICKEL PLATING 50U MIN,
WELDING SURFACE 1U MIN GOLD PLATING,
CONTACT AREA 3U MIN GOLD PLATING
3.2. SALT SPRAY TEST TO MEET THE REQUIREMENTS OF 24 HOURS.

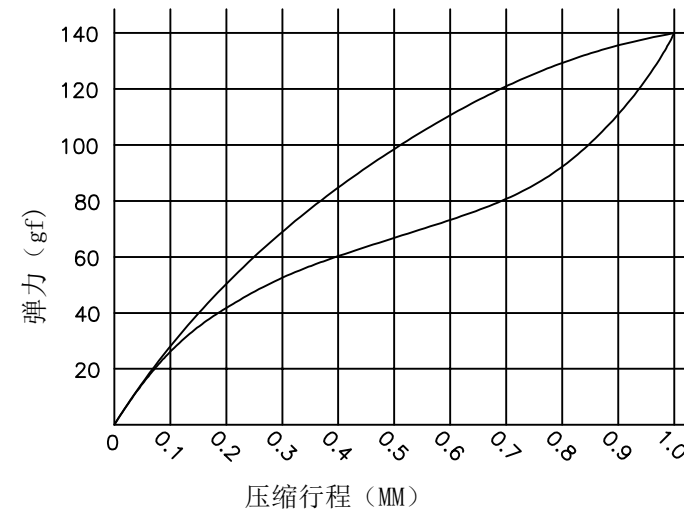

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.25	X.*	±	3"
.X	±	0.20	.X*	±	2"
.XX	±	0.15	.XX*	±	1"

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: I. L
DATE: 2017. 3. 1

CHECKED: C. W
DATE: 2017. 3. 1

APPROVED: C. W
DATE: 2017. 3. 1

TITLE: Antenna Shrapnel Connector
4. 00*1. 50*2. 55H(D TYPE)

MATERIAL: FINISH:	PART NO: AS-R5-098-0025D DWG NO: AS-R5-098-0025D	SIZE: A4
-------------------	---	----------

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------