



RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

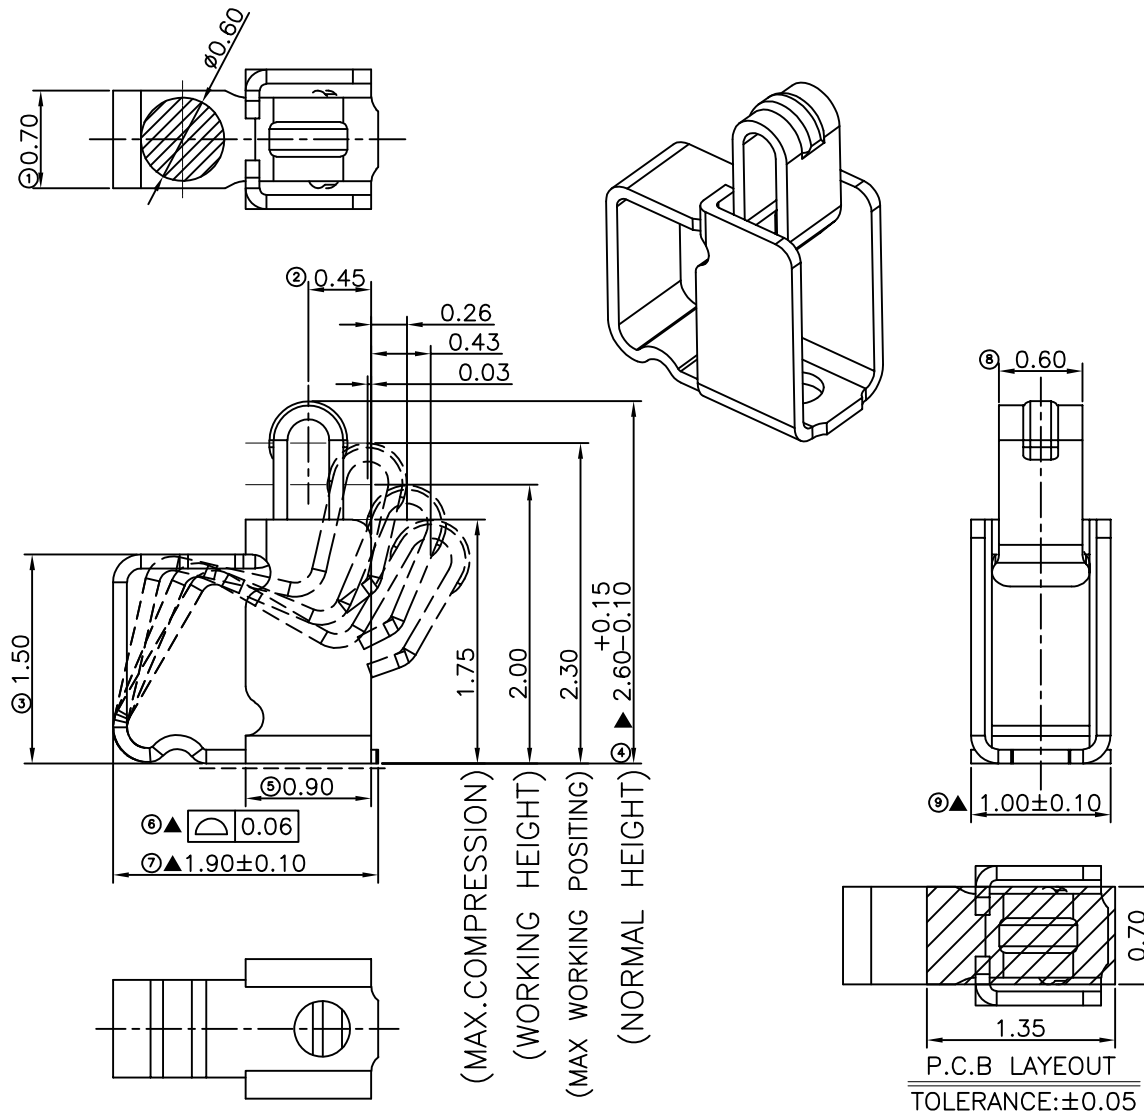

- MATERIAL SPECIFICATION:
 - 1.1. STAINLESS STEEL SUS-301 T=0.08±0.005MM
- TEST REQUIREMENTS:
 - 2.1. CONTACT RESISTANCE: 80MΩ MAX
 - 2.2. VOLTAGE RATING: 1.5 V/AC/DC/MAX
 - 2.3. RATED CURRENT: 1.0A/MAX
 - 2.4. WELDING THRUST: ≥3.0 KG
 - 2.5. DURABILITY: 1,500 TIMES
 - 2.6. OPERATING TEMPERATURE: -20 ° ~ 80 ° C
- PLATING REQUIREMENTS:
 - 3.1. OVERALL NICKEL PLATING 50U MIN, WELDING SURFACE 2U MIN GOLD PLATING, CONTACT AREA 3U MIN GOLD PLATING
 - 3.2. TERMINAL TO EAT ALL TIN, NOT PEELING, WELDING, OBVIOUS COLOR AND OTHER ADVERSE
 - 3.3. ENVIRONMENTAL PROTECTION, NON-HYDROGEN FLUORIDE AND A SERIES OF DOMESTIC AND FOREIGN ENVIRONMENTAL REQUIREMENTS

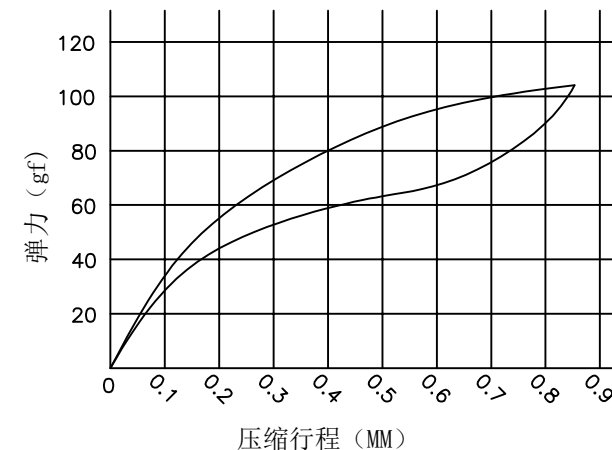

Bestcreate Technology Limited

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L	DATE: 2017. 3. 1
CHECKED: C. W	DATE: 2017. 3. 1
APPROVED: C. W	DATE: 2017. 3. 1

TITLE: Antenna Shrapnel Connector 1. 90*1. 00*2. 60H(E TYPE)		
MATERIAL: AS-R5-098-0026E	PART NO: AS-R5-098-0026E	SIZE: A4
FINISH: AS-R5-098-0026E	DWG NO: AS-R5-098-0026E	