

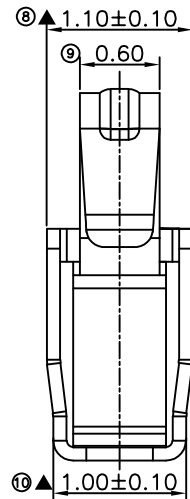


RoHS Compliant


REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

- 1.产品材质:
1.1.不锈钢 T=0.10±0.005MM
2.测试要求:
2.1.接触阻抗: 80mΩ MAX
2.2.额定电压: 1.5 V/AC/DC/MAX
2.3.额定电流: 1.0A/MAX
2.4.焊接推力: ≥3.0 Kg
2.5.耐久寿命: 1,500 TIMES
2.6.工作温度: -20 ° ~ 80 ° C
3.电镀要求:
3.1.整体镀镍 50U MIN,
焊接区域镀金 1U MIN
接触区域镀金 3U MIN
3.2.盐雾测试要求 24 小时.

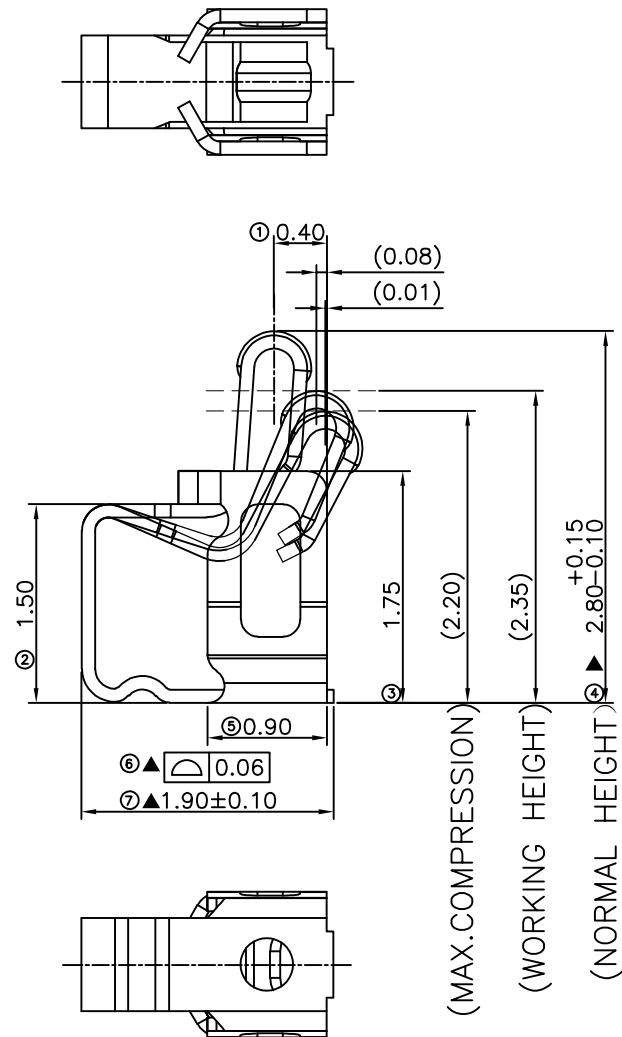

P.C.B LAYOUT
TOLERANCE:±0.05

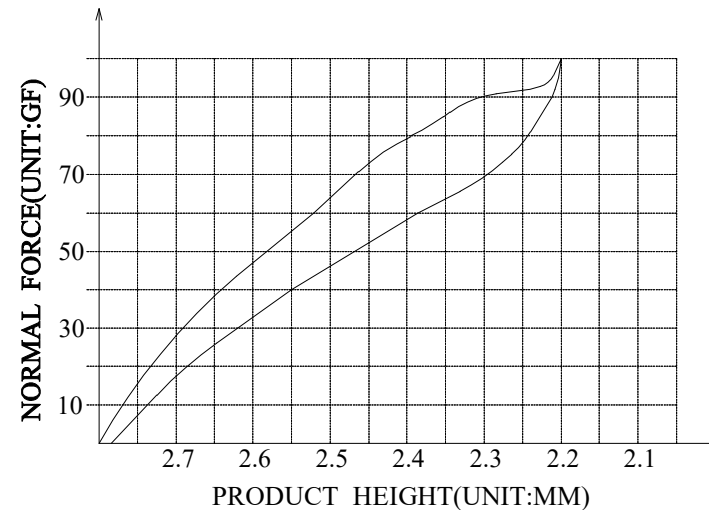

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.25	X.*	±	3"
.X	±	0.20	.X*	±	2"
.XX	±	0.15	.XX*	±	1"

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L
DATE: 2017. 3. 1

CHECKED: C. W
DATE: 2017. 3. 1

APPROVED: C. W
DATE: 2017. 3. 1

TITLE: Antenna Shrapnel Connector
1. 90*1. 00*2. 80H(D TYPE)

MATERILA:	PART NO: AS-R5-098-0028D	SIZE: A4
FINSH:	DWG NO: AS-R5-098-0028D	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
-----------	------------	--------------	--------------------