

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES:

1) MATERIAL:

1-1 HOUSING:THERMOPLASTIC LCP UL 94V-0,COLOR:WHITE

1-2 CONTACT:SUS304 T=0.12mm

2) FINISH:

CONTACT:OVERALL NICKEL PLATING 50U MIN,
WELDING SURFACE 5U MIN GOLD PLATING,
CONTACT AREA 5U MIN GOLD PLATING

3) PRODUCT SPECIFICATIONS;

3-1 VOLTAGE RATING:30V






3-2 CURRENT RATING:0.5A

3-3 CONTACT RESISTANCE;30 milliohm(initial) Max.

3-4 INSULATION RESISTANCE:100 MEGOHM Min.

3-5 OPERATION TEMPERATURE:-25° TO +85°

3-6 CONTACT NORMAL FORCE 40~80gf

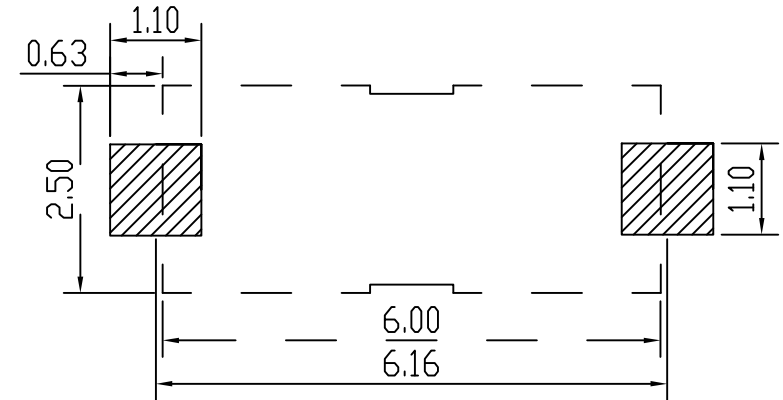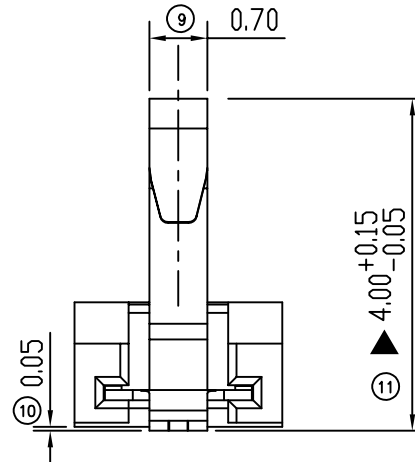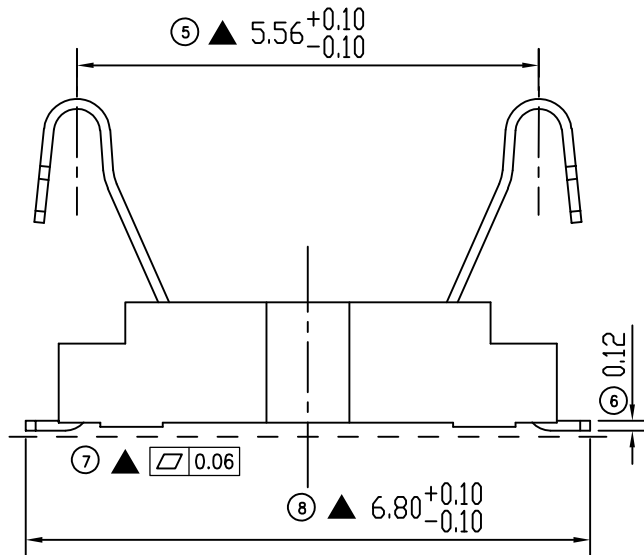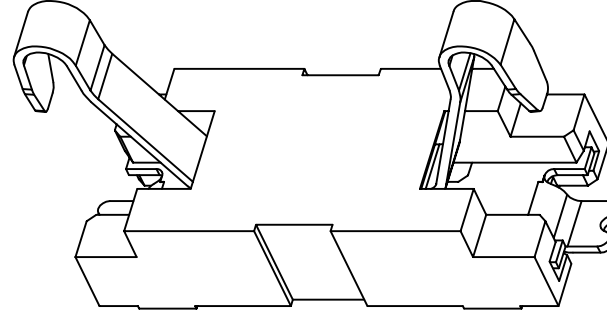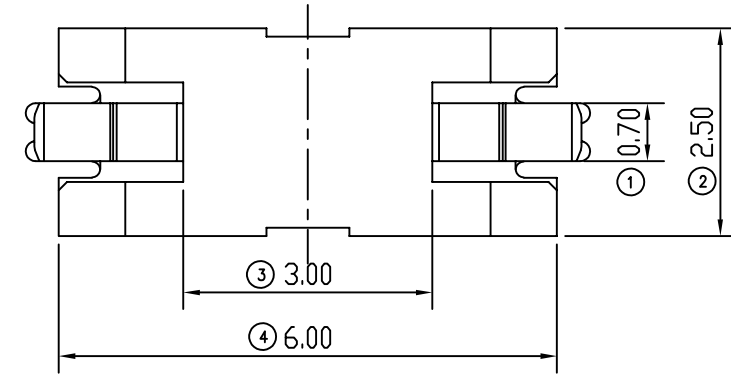

P.C.B LAYOUT
TOLERANCE:±0.05

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.25	X.*	±	3°
.X	±	0.20	.X*	±	2°
.XX	±	0.15	.XX*	±	1°

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

DATE:

I.L

2017.3.1

CHECKED:

DATE:

C.W

2017.3.1

APPROVED:

DATE:

C.W

2017.3.1

TITLE:

2PIN Battery holder shrapnel
(0.7W)4.0H Terminals

MATERIAL:

PART NO:

AS-R5-098-0040B

SIZE:

A4

FINISH:

DWG NO:

AS-R5-098-0040B

REV:

A

UNIT

mm

SCALE

1=1

QUALITY
SYMBOLS

