

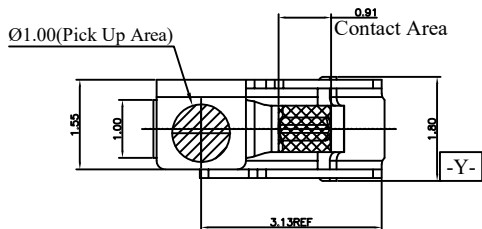
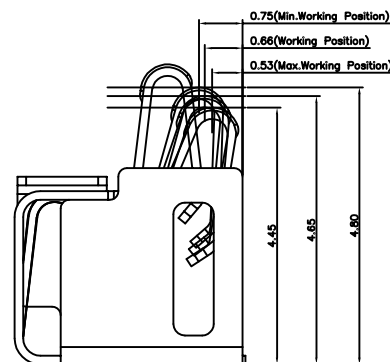
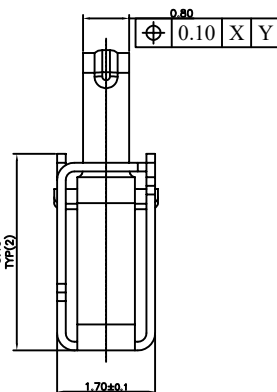
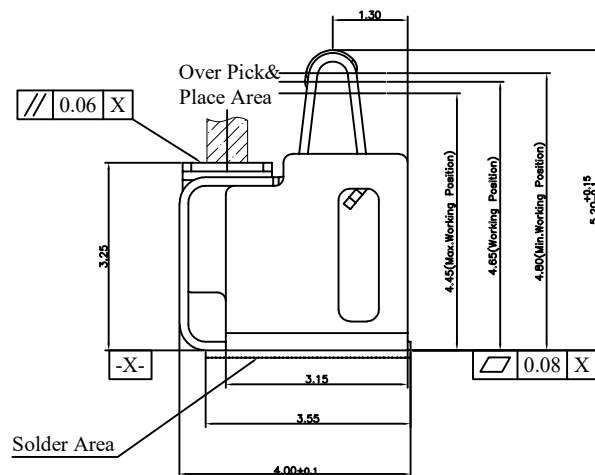



RoHS Compliant



3D View

(For Reference Only)
Stated At Compression

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)



METAL MASK T=0.08
TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)

NOTES:

1:MATERIAL

1-1: C5210 THICKNE=0.15MM

2:SPECIFICATIONS

2-1: RATED CURRENT: 1.0A

2-2: VOLTAGE RATING: 1.5V

2-3: CONTACT RESISTANCE: 80mΩ/MAX

2-4: WELDING THRUST: ≥3KG

2-5: OPERATING TEMPERATURE: -40°C~+85°C

3:DURABILITY: 1500 CYCLES


4:SALT SPRAY TIME: 24H

5:ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 50u" MIN

6:REQUIREMENTS

6-1:TERMINAL TO EAT FULL TIN,NOTPEELING.

WELDING OBVIOUS COLOR AND OTHED ADVERSE


6-2:ROHS、REACH、HF HALOGER ADVERSE OF DOMESTIC
AND INTERNATIONAL ENVIRONMNTAL REQUIREMENTS**Bestcreate Technology Limited**

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS



TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.25	X.*	±	3"
.X	±	0.20	.X.*	±	2"
.XX	±	0.15	.XX.*	±	1"

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

I. L

CHECKED:

C. W

APPROVED:

C. W

DATE:

2017. 3. 1

DATE:

2017. 3. 1

DATE:

2017. 3. 1

TITLE:

Antenna Shrapnel Connector
4.00*1.70*5.2H

MATERILA:

FINSH:

PART NO:

AS-R5-098-0052

DWG NO:

AS-R5-098-0052

SIZE:

A4