

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

Features:

- 1.4~16 circuits available;
- 2.Material:LCP UL94V-0 Black/Natural;
- 3.PIN Material:High conductivity copper alloy Tin-plated,SQ0.64;
- 4.Mates with H250012 housing;

Specification:

Current rating:8A at 10A .
Voltage rating:400V AC(RMS) or 400V DC Max.
Contact resistance:10mΩ Max.
Insulation resistance:100MΩ Min.
Withstanding voltage:1800VAC/minute.
Ambient temperature range:−40°C~105°C.
Dimensional information(mm)

Circuits	DIM A	DIM B
4	5.94	2.50
6	8.44	5.00
8	10.94	7.50
10	13.44	10.00
12	15.94	12.50
14	18.44	15.00
16	20.94	17.50













PART NO. INFORMATION

H250014-XX-X

SERIES NO:

PIN Q' PY:
04~16

A-BLACK (KEY A)
B-NATURE (KEY B)

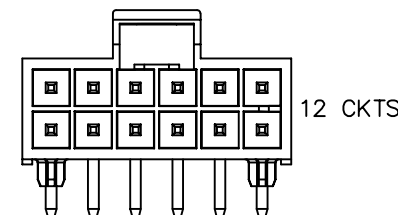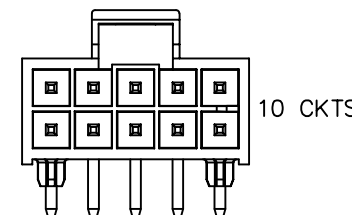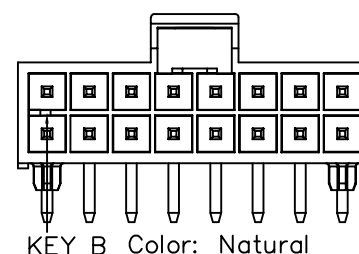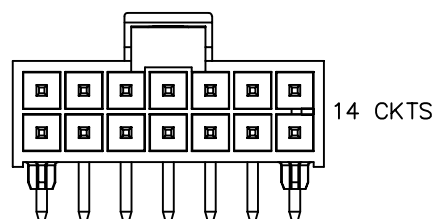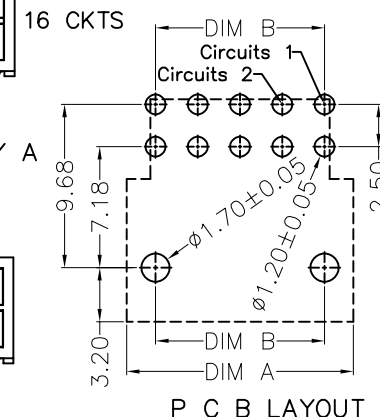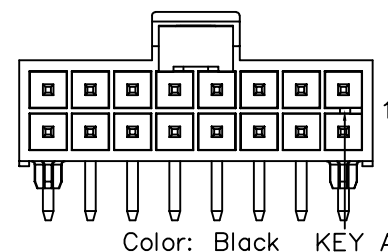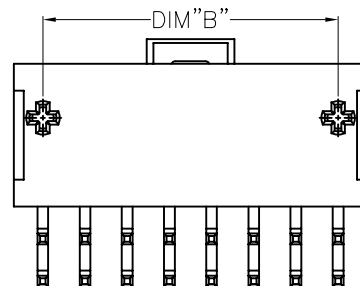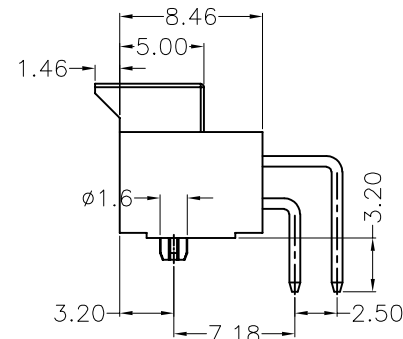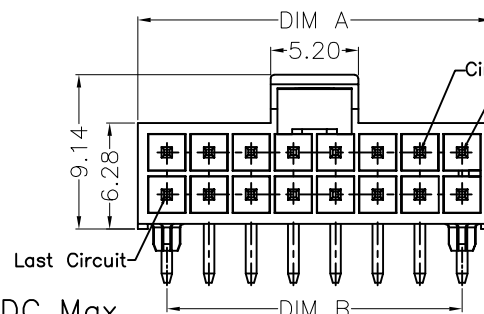

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.40	X.*	±	3"
.XX	±	0.25	.X*	±	2"
.XXX	±	0.15	.XX*	±	1"

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: DATE: 2019.3.5

CHECKED: DATE: 2019.3.5

APPROVED: DATE: 2019.3.5

TITLE: 2.5 mm Right Angle Dual Row header

MATERIAL: PART NO: H250014-XX-X SIZE: A4

FINISH: DWG NO: H250014-XX-X

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------