

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

Features:

- 1.4~16 circuits available;
- 2.Material:LCP UL94V-0 Black/Natural;
- 3.PIN Material:High conductivity copper alloy Tin-plated,SQ0.64;
- 4.Mates with H350012 housing;

Specification:

Current rating:14A at 16A.
Voltage rating:400V AC(RMS) or 400V DC Max.
Contact resistance:10mΩ Max.
Insulation resistance:100MΩ Min.
Withstanding voltage:1800VAC/minute.
Ambient temperature range: -40℃~105℃.
Dimensional information(mm)

Circuits	DIM A	DIM B	DIM C
4	3.50	8.00	7.00
6	7.00	11.50	7.00
8	10.50	15.00	7.00
10	14.00	18.50	10.50
12	17.50	22.00	14.00
14	21.00	25.50	17.50
16	24.50	29.00	21.00

PART NO. INFORMATION

H350014-XX-X



SERIES NO:

PIN Q'PY:


04~16

A-BLACK (A KEY)






B-NATURE (B KEY)

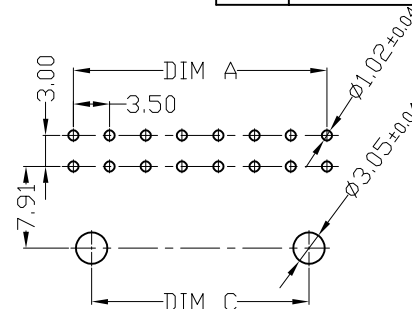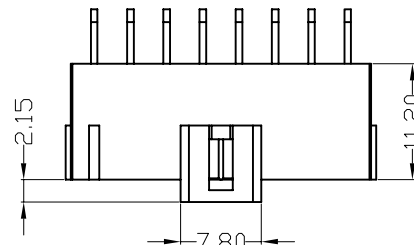


PCB Layout









PCB Layout(6PIN)

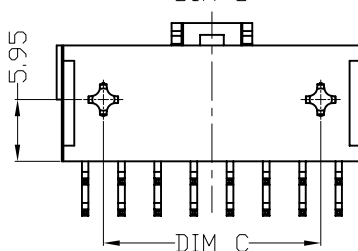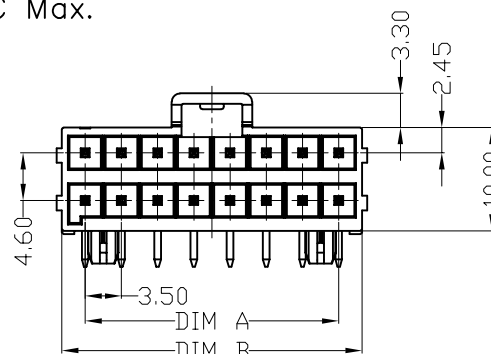

KEY B



KEY A



Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.40	X.*	±	3'
.XX	±	0.25	.X.*	±	2'
.XXX	±	0.15	.XX.*	±	1'

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L

2018.3.5

CHECKED:

DATE:

C. W

2018.3.5

APPROVED:

DATE:

C. W

2018.3.5

TITLE:

3.5 mm Right Angle Dual Row header

MATERIAL:

PART NO:

H350014-XX-X

SIZE:

A4

FINISH:

DWG NO:

H350014-XX-X

REV:

A


UNIT

mm

SCALE

1=1

QUALITY SYMBOLS



1

2

3

4

5

6

7

8