


RoHS Compliant

注：带“▼”标识为首样检验尺寸；带“○”标识为巡检检验尺寸；

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

DATE CODE  
YYMMDD  
YEAR  
MONTH  
DATE

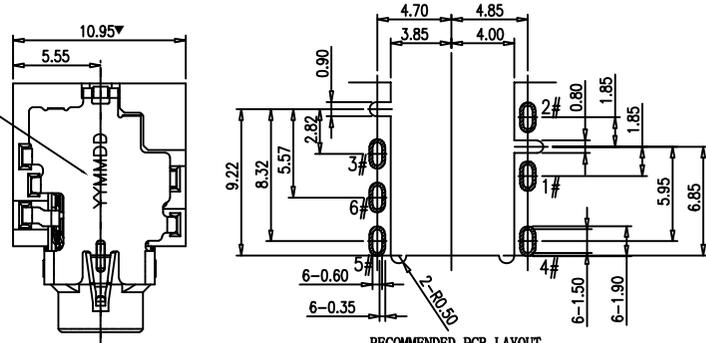

RECOMMENDED PCB LAYOUT  
(TOP VIEW) TOLERANCE: ±0.05mm

NOTES:  
CURRENT RATING: 1A.  
VOLTAGE RATING: 12V.  
INSULATION RESISTANCE: 100MΩ Min.  
CONTACT RESISTANCE: 50mΩ Max(INITIAL);  
100mΩ Max(FINAL);  
DIELECTRIC WITHSTANDING VOLTAGE: 500V/AC 1MINUTE.  
MATING FORCE: 0.3~3Kgf.  
UNMATING FORCE: 0.3~3Kgf.  
DURABILITY: 5000 CYCLES.








TABLE 1:

①	SEPARATOR	5	1	HIGH TEMP. PLASTIC	UL94 V-0	BLACK
⊕	DUMMY PIN	1	1	Stainless steel	WASH	T=0.15mm
⊙	MAKE	6	1	Phosphor bronze		T=0.20mm
⊖	TRANSFER	5	1	Phosphor bronze	All Over Nickel 50μ"MIN Gold Flash On Contact And Welding Area,	T=0.20mm
⊕	TIP	4	1	Phosphor bronze		T=0.20mm
⊖	RING A	3	1	Phosphor bronze		T=0.20mm
⊙	RING B	2	1	Phosphor bronze		T=0.20mm
⊖	EARTH	1	1	Phosphor bronze	Ni 50u",G/F Contact area	T=0.20mm
⊕	HOUSING	1	1	HIGH TEMP. PLASTIC	UL94 V-0	BLACK
NO.	PART NAME	QTY		MATERIAL	DESCRIPTION	REMARK

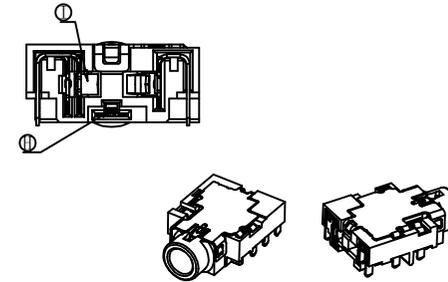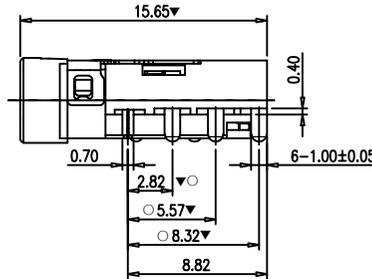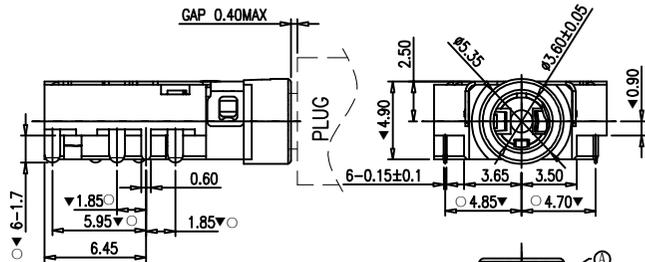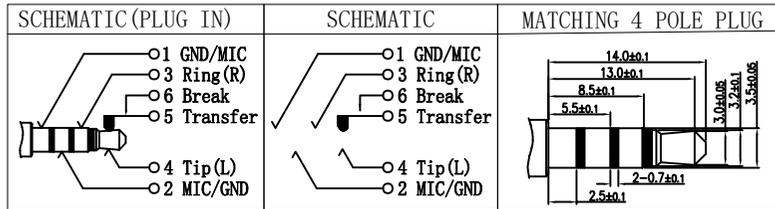

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.30	X.*	± 5"
.XX	± 0.20	.X.*	± 3"
.XXX	± 0.10	.XX.*	± 1"

DESIGN:

DATE:

TITLE:

I. L

2017. 3. 1

3.5MM PHONE JACK CONNECTOR CHO.9 MID-MOUNT 4POLE

CHECKED:

DATE:

MATERILA:

PART NO:

SIZE:

C. W

2017. 3. 1

PJ350-04-A0013

A4

APPROVED:

DATE:

FINSH:

DWG NO:

1 OF 2

C. W

2017. 3. 1

PJ350-04-A0013

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS



Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

1

2

3

4

5



6

7

8

RoHS Compliant


REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

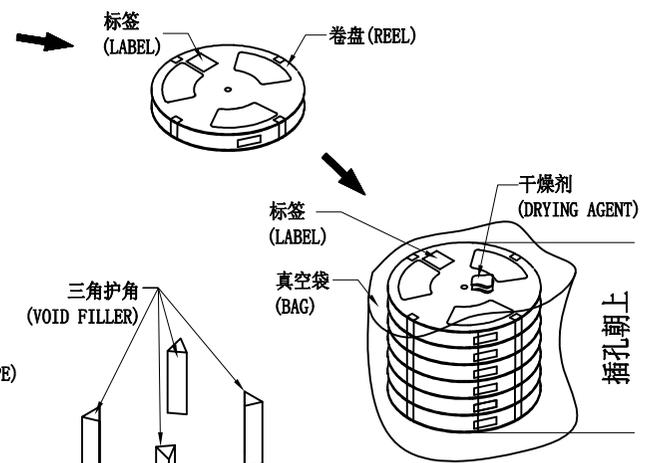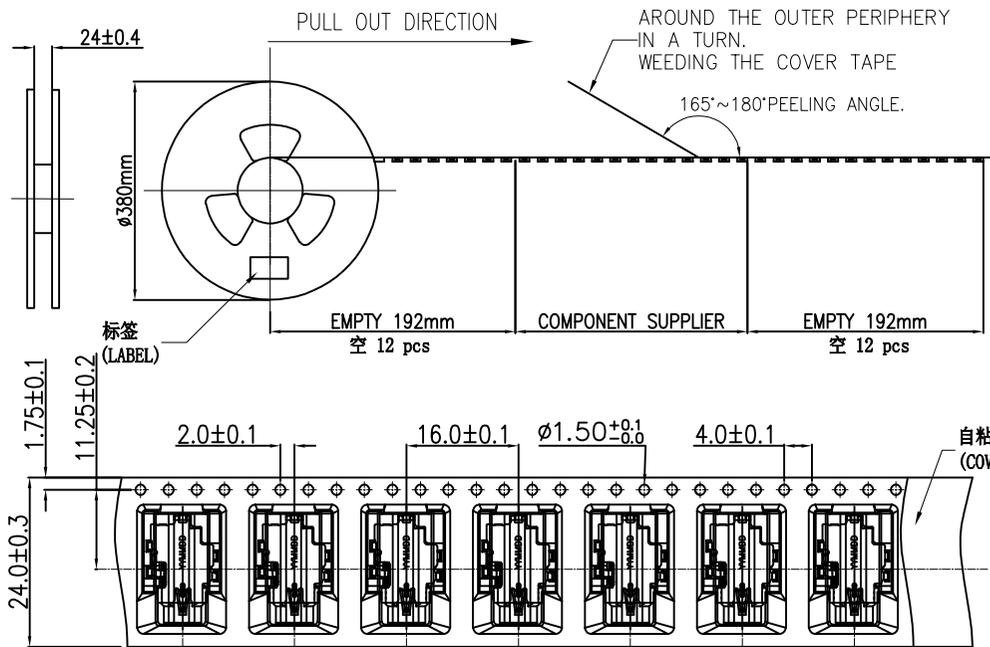

注 (NOTES) :

- 材料 (MATERIAL):  
 自粘带 (COVER TAPE): PET  
 载带 (CARRIER TAPE): PS  
 卷盘 (REEL): PS  
 纸箱 (CARTON): K=K  
 三角护角 (VOID FILLER): K=A  
 真空袋 (WATERPROOF BAG): PE
- 抗剥离力 (PEELING RESISTANCE): 10gf~120gf
- 剥离速度 (PEELING SPEED): 300mm/MINUTES
- 包装数量 (PACKAGE QUANTITY):

每盘 (REEL)	每箱 (BOX)	每箱 (BOX)
900 PCS	10 REEL	9000 PCS

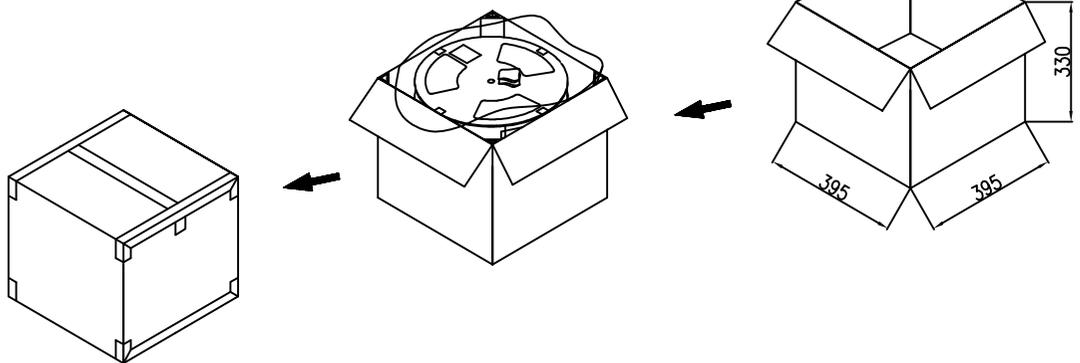

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.30	X."	± 5'
.XX	± 0.20	.X"	± 3'
.XXX	± 0.10	.XX"	± 1'

Website: [www.bsc-elec.com](http://www.bsc-elec.com)  
 Email: [bestcreate@bsc-elec.com](mailto:bestcreate@bsc-elec.com)

DESIGN: I. L      DATE: 2017. 3. 1

CHECKED: C. W      DATE: 2017. 3. 1

APPROVED: C. W      DATE: 2017. 3. 1

TITLE: 3.5MM PHONE JACK CONNECTOR CHO.9 MID-MOUNT 4POLE

MATERIAL:      PART NO: PJ350-04-A0013      SIZE: A4

FINSH:      DWG NO: PJ350-04-A0013      2 OF 2

REV:	UNIT	SCALE	QUALITY SYMBOLS
A	mm	1=1	